



# 2024 CATALOG



TIRES DESIGNED FOR CHAMPIONS

## NO WARRANTY POLICY

**Hoosier Racing Tire Corp.** offers racing tires for sale only upon the conditions and the terms contained in this disclaimer of liability and indemnity. Due to many varied and different conditions which Hoosier Racing Tires and Tubes are exposed and because of the manner in which racing is conducted, Hoosier Racing Tire Corp. makes absolutely **no warranty**, expressed or implied, as to the fitness for a general or particular purpose or of merchantability in connection with any offer of sale of Hoosier Racing Tires and tubes. **“HOOSIER RACING TIRES AND TUBES ARE SOLD AS IS.”** Race tires are not tested or labeled to meet FMVSS 109, 119, 139 or ECE36 Safety Standards. Therefore it is dangerous and illegal to sell race tires for use on public highways. Any person selling Hoosier Racing Tires or Tubes for highway use agrees to indemnify and reimburse Hoosier Racing Tire Corp. for all loss, damage, or liability Hoosier Racing Tire Corp. may suffer because of such sales. Not applicable where prohibited by law. Not following these warnings can cause **SERIOUS PERSONAL INJURY OR DEATH**. For more information read tire labels, follow manufacturer’s warnings as molded in tire sidewalls and visit [hoosiertire.com](http://hoosiertire.com).

## FREEZE WARNING

**Freeze Crack Advisory:** This advisory addresses proper storage and use of Hoosier tires in cold conditions. Hoosier Tires, especially asphalt and hard compound tires, may experience Rubber Cracking if the tires are transported, crushed, flexed or stressed when frozen. The following guidelines are provided to avoid this problem.

1. Always store Hoosier Racing Tires indoors at temperatures above 32° F.
2. If tires have been subject to 32° F or less, allow them to warm to room temperature (about 70° F) for a minimum of 24 hrs before the tire is mounted, transported or flexed.
3. Always use spare tires not intended for future competition to store vehicles for prolonged periods of time or winter transport.
4. If below freezing temperatures are expected, please consider shipping tires once more favorable conditions exist.

**Do not use tires that have evidence of Freeze Crack Damage.**

## WARNING

Service Life for Race Tires: Old tires can fail in use, causing loss of vehicle control and personal injury. Environmental conditions like temperature extremes, exposure to sunlight, electric arc, solvents, automotive fluids, and atmospheric pollutants accelerate the aging process. Hoosier Racing Tire strongly recommends that new (sticker) tires should be put in service within 2 years of date of purchase. Used (scuffed) tires have a shorter service life than new (sticker) tires. Poor storage and infrequent use accelerate the aging process.

## DIRECTION OF ROTATION / MOUNTING INSTRUCTIONS

### ROTATIONAL GUIDELINES FOR TIRES WITH DIRECTIONAL ARROWS

All Hoosier tires having directional arrows must be mounted so that the tire travels in the direction of the arrow. Hoosier tires having directional arrows will have them on both sidewalls. Directional arrows may not be on a tire that can have both left and/or right side application. All Hoosier tires not having directional arrows should be mounted as detailed below.

### ROTATIONAL GUIDELINES FOR TIRES WITHOUT DIRECTIONAL ARROWS

Every Hoosier race tire has a four character serial code embossed into ONE sidewall of the tire. All Hoosier DOT tires will also have two additional codes as required by the Department of Transportation. (Example: J7AB 4AX8 3710)

#### CIRCLE TRACK RACING TIRES:

(Includes both dirt and asphalt tires)

Hoosier tires must be mounted with the serial code located toward the infield.

#### CIRCUIT & RALLY TIRES:

(Includes catalog numbers beginning with 43, 44, 45, 46)

In most cases, Hoosier tires used in Circuit & Rally applications should be mounted with the serial code toward the center of the vehicle. Once a tire has been run in the proper orientation it is acceptable to remount the tire in the opposite direction to even out the wear.

#### DRAG RACING TIRES, INCLUDING DOT DRAG TIRES:

(Includes catalog numbers beginning with 17, 18)

Hoosier drag tires can be mounted to rotate in either direction. Hoosier drag tires can also be flipped or reversed to provide even wear.

#### DIRT BIKE TIRES:

FRONT TIRES – Mount serial code facing brake caliber.

REAR TIRES – Mount serial code facing sprocket side

## WARNING - TIRE MOUNTING IS DANGEROUS

**Special Tire Mounting Instructions:** Tire mounting should be done **ONLY** by trained personnel using proper tools and procedures. Failure to follow safe mounting procedures could cause faulty positioning of the tire and cause the assembly to burst with explosive force sufficient to cause **SERIOUS PERSONAL INJURY OR DEATH**. Always inspect tire for kinked beads or other possible damage that may have occurred in shipping or storage. Clean the rim especially in the bead area before mounting a tire. Lubricate the tire beads as needed with a purpose made tire mounting liquid or paste. Always lock rim on mounting machine or place in safety cage. Use a clip on chuck, an in-line valve with a pressure gauge or adjustable regulator and remote inflation/deflation device. Have enough air hose to stay out of the trajectory. Stand back.

## WARNING - VERIFY RIM SIZE

**Verify Correct Wheel and Bead Flange:** All tires are designed to be used on wheels that are manufactured to Tire and Rim Association (T&RA) specifications and tolerances. Some rims are non-standard or damaged and it is necessary to inspect the rim flange to assure proper fit. Consult your specific rim manufacturer to determine if your rim can be used in this application. Never attempt to install and inflate a tire of one bead diameter on a rim or wheel of a different bead diameter. Use of Hoosier Racing Tires on wheels with incorrect bead flanges or wheels that do not meet T&RA standards can cause the assembly to fail and burst with explosive force sufficient to cause **SERIOUS PERSONAL INJURY OR DEATH**. Use a certified wheel rim disk tape to confirm wheel rim flange size.

## WARNING - BEAD / RIM SEATING

When seating beads never exceed maximum bead seating pressure as molded in tire sidewall. Never exceed manufacturer's maximum inflation pressure. Always seat beads with wheel locked to mounting machine or placed in a safety cage. A damaged tire or wheel can fail during bead seating and burst with enough force sufficient to cause **SERIOUS PERSONAL INJURY OR DEATH**. Always use a clip on chuck, an in-line valve with a pressure gauge or adjustable regulator and remote inflation/deflation device. Have enough air hose to stay out of the trajectory. Stand back. If the beads will not seat at the manufacturers maximum bead seating pressure, STOP, deflate tire, return the tire to the place of purchase.

## WARNING - NOT FOR HIGHWAY USE

**NOT FOR HIGHWAY USE:** All Hoosier Racing Tires including DOT labeled Hoosier Racing Tires are designed for racing purposes only on specified racing surfaces and are **not to be operated on public roadways**. DOT labeled Hoosier Racing Tires meet Department Of Transportation requirements for marking and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing Tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and **SERIOUS PERSONAL INJURY OR DEATH**.

Exception – "PRO STREET" page 20.

## WARNING - MISUSE / MISAPPLICATION

**Application/Misuse:** All Hoosier Racing Tire products are designed for a specific purpose. Consult with Hoosier Racing Tire Corp. for specific fitment and application. Utilizing Hoosier Tires in any form outside of their intended use constitutes **MISUSE** of the product and can cause **SERIOUS PERSONAL INJURY OR DEATH**. Hoosier Racing Tire products are designed and manufactured for racing purposes only, within a closed course designed for organized competition. Not for recreational use. Hoosier Tires should never be used for Off Track Exhibition or for Land Speed Record Vehicles including Jet or Rocket Powered Cars.

## WARNING - DO NOT ALTER TIRES

**Chemical Treatment of Tires:** Hoosier Racing Tires strictly forbids any chemical alteration of the tire carcass and/or tread compound such as tire "soaking" or use of tread "softener." Hoosier Racing Tire strictly forbids the physical defacement (removal, altering or covering), of tire sidewall markings in any manner. Failure to comply with this warning could result in premature or catastrophic tire failure and may result in **SERIOUS PERSONAL INJURY OR DEATH**.



HOOSIER

We fuel passion,  
pride and  
success.

# TABLE OF CONTENTS

| LEAD #   | TIRE   | PAGE #             |
|----------|--|--------------------|
|          | <b>NO WARRANTY POLICY &amp; WARNINGS</b>                                   | Inside Front Cover |
|          | Direction of Rotation / Mounting   |                    |
|          | Instructions .....   | 6                  |
| 41       | <a href="#">Little Car Asphalt / Mini-Cup</a> .....                        | 6                  |
| 13       | <a href="#">Midget Asphalt</a> .....                                       | 6                  |
| 08/10/37 | <a href="#">Asphalt Short Track</a> .....                                  | 6-7                |
| 08/09    | <a href="#">Modified / Supers / Sprint Asphalt</a> .....                   | 8                  |
| 36       | <a href="#">Late Model / E-Mod / Street Stock Dirt</a> .....               | 8-9                |
| 36/14    | <a href="#">Eastern Modified / 358 / Sportsman Dirt</a> .....              | 9                  |
| 38       | <a href="#">Wing Sprint Dirt</a> .....                                     | 10                 |
| 38       | <a href="#">Non-Wing Sprint Dirt / Silver Crown Short Track Dirt</a> ..... | 10                 |
| 38       | <a href="#">Silver Crown Dirt / Mile Tracks</a> .....                      | 11                 |
| 35       | <a href="#">Midget Dirt / Mini Sprint / TQ Midget</a> .....                | 11                 |
| 42       | <a href="#">Modified Midget / Micro Sprint Dirt / Jr. Sprint</a> .....     | 12                 |
| 11/15    | <a href="#">Dirt Oval Karting</a> .....                                    | 12                 |
| 11       | <a href="#">Treaded Kart</a> .....   | 13                 |
| 15       | <a href="#">Asphalt Oval Karting</a> .....                                 | 13                 |
| 15       | <a href="#">Asphalt Quarter Midget</a> .....                               | 14                 |
| 11       | <a href="#">Dirt Quarter Midget</a> .....                                  | 14                 |
| 22       | <a href="#">5" Sprint / Solo Kart</a> .....                                | 14-15              |
|          | <a href="#">Super Kart &amp; Enduro</a> .....                              | 15                 |
| 18       | <a href="#">Drag Racing</a> .....  | 16-17              |
| 18       | <a href="#">Drag Racing - Radial</a> .....                                 | 17                 |
| 18       | <a href="#">Drag Bracket Radial</a> .....                                  | 17-18              |
| 18       | <a href="#">JR Dragster</a> .....  | 18                 |
| 17       | <a href="#">D.O.T. Drag - Radials</a> .....                                | 18-19              |
| 17       | <a href="#">Quick Time Pro D.O.T.</a> .....                                | 19                 |
| 17       | <a href="#">Quick Time D.O.T.</a> .....                                    | 20                 |
| 28/32    | <a href="#">Racing Tubes &amp; Liner</a> .....                             | 20                 |
| 19       | <a href="#">Pro Street D.O.T. – Radial</a> .....                           | 20                 |
| 43       | <a href="#">Circuit Racing Slicks – Bias</a> .....                         | 21                 |
| 43       | <a href="#">Circuit Racing Slicks – Radial</a> .....                       | 21                 |
| 43/44    | <a href="#">Circuit Racing Wets – Bias</a> .....                           | 22                 |
| 44       | <a href="#">Circuit Racing Wets – Radial</a> .....                         | 23                 |
| 43/44    | <a href="#">Vintage Sportscar</a> .....                                    | 23                 |
| 43/44    | <a href="#">Vintage Formula</a> .....                                      | 24                 |
| 43/44    | <a href="#">Vintage T-Section</a> .....                                    | 24                 |
| 46       | <a href="#">Vintage Radial</a> .....                                       | 25                 |
| 46       | <a href="#">Circuit Racing D.O.T. – Radial</a> .....                       | 25-26              |
| 46       | <a href="#">Circuit Racing D.O.T. – Radial Wet</a> .....                   | 27                 |
| 41/43/44 | <a href="#">Formula Student (FSAE)</a> .....                               | 27                 |
| 48/44    | <a href="#">Rally</a> .....  | 28                 |
| 07       | <a href="#">Dirt Bike</a> .....  | 29                 |
| 11/16/42 | <a href="#">ATV / 3 Wheeler</a> .....                                      | 29                 |
| 16       | <a href="#">UTV / SxS</a> .....  | 30                 |
|          | <a href="#">General Tire</a> .....   | 31                 |
|          | <a href="#">Continental Vintage</a> .....                                  | 32                 |
|          | <a href="#">Continental Extreme Contact Force</a> .....                    | 33                 |
|          | <a href="#">Continental GR CUP</a> .....                                   | 34                 |
|          | Hoosier Racing Tire Distributors .....                                     | Back Cover         |

## SEE WARNINGS STARTING ON INSIDE COVER

Tire rule spec tires may not be listed in this catalog. Please contact local distributor for further information.

REV. 15/23  
First Printing

REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## LITTLE CAR ASPHALT / MINI-CUP

| ITEM NUMBER     | TIRE SIZE      | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-----------------|----------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 41100           | 6.0/18.0-10    | Slick         | 6.0"        | 18.0"        | 56-57"        | 6-7"             | 7"                 | 8.5"          | LC0                              |
| 41120           | 8.0/18.0-10    | Slick         | 8.0"        | 18.0"        | 56-57"        | 7-8"             | 8"                 | 9.8"          | LC3                              |
| 41130           | 10.0/19.0-10   | Slick         | 10.0"       | 19.0"        | 60.0"         | 10"              | 10"                | 12.2"         | LC5                              |
| <b>MINI-CUP</b> |                |               |             |              |               |                  |                    |               |                                  |
| 41149           | 15.0/ 7.0-8 SH | Slick         | 6.25"       | 15.37"       | 48.25"        | 7-8"             | 8"                 | 7.5"          | MC780                            |
| 41150           | 15.0/ 7.0-8    | Slick         | 6.25"       | 15.75"       | 49.5"         | 7-8"             | 8"                 | 7.5"          | MC780                            |



**SLICK**



## MIDGET ASPHALT

| ITEM NUMBER | TIRE SIZE          | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|--------------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 13109       | 7.0/20.5-13        | Slick         | 7.0"        | 20.5"        | 65.0"         | 8"               | 8"                 | 8.6"          | MG4                              |
| 13110       | 7.0/20.5-13        | Slick         | 7.0"        | 20.5"        | 66.0"         | 8"               | 8"                 | 8.6"          | 700, MG5                         |
| 13115BG06   | 7.0/20.5-13 BG2006 | Slick         | 7.0"        | 20.5"        | 65.0"         | 8"               | 8"                 | 8.6"          | BG2006                           |
| 13195       | 10.0/22.0-13       | Slick         | 9.0"        | 22.0"        | 69.0"         | 8"               | 8"                 | 11.2"         | MG5                              |
| 13210       | 10.0/23.5-13       | Slick         | 10.0"       | 23.5"        | 73.0"         | 10"              | 10"                | 11.6"         | 760                              |
| 13240       | 12.0/23.5-13       | Slick         | 12.0"       | 23.5"        | 74.0"         | 10-12"           | 10"                | 13.5"         | 700                              |



**SLICK**



## ASPHALT SHORT TRACK

| ITEM NUMBER | TIRE SIZE       | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|-----------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 08651       | 27.0/10.0-15    | Slick         | 10.0"       | 27.5"        | 86.0"         | 10"              | 10"                | 13.2"         | 1057                             |
| 10050       | 8.0/23.0-13     | Slick         | 8.0"        | 23.5"        | 73.8"         | 8"               | 8"                 | 10.2"         | F60                              |
| 10051       | 8.0/23.0-13 SH  | Slick         | 8.0"        | 23.0"        | 72.5"         | 8"               | 8"                 | 10.2"         | F60                              |
| 10060       | 22.5/ 7.0-13    | Street Tread  | 7.0"        | 22.5"        | 70.7"         | 6"               | 6"                 | 8.6"          | Sportsman                        |
| 10070       | 23.0/ 7.0-13    | Street Tread  | 7.0"        | 23.0"        | 72.2"         | 6"               | 6"                 | 8.6"          | Sportsman, Super TD              |
| 10100       | 22.5/ 8.0-13    | Rib Asphalt   | 8.0"        | 22.5"        | 70.7"         | 8"               | 8"                 | 9.8"          | 700                              |
| 10110       | 23.0/ 8.0-13    | Rib Asphalt   | 8.0"        | 23.0"        | 72.2"         | 8"               | 8"                 | 9.8"          | 700                              |
| 10160       | 10.0/27.0-15 SH | Slick         | 10.0"       | 27.0"        | 84.8"         | 10"              | 10"                | 13.2"         | 1070                             |
| 10170       | 10.0/27.0-15    | Slick         | 10.0"       | 27.5"        | 86.0"         | 10"              | 10"                | 13.2"         | 1070                             |
| 10180       | 26.5x8.0-15     | Slick         | 8.0"        | 26.8"        | 84.0"         | 8"               | 8"                 | 11.5"         | F70                              |
| 10181       | 26.5x8.0-15     | Slick         | 8.0"        | 26.8"        | 84.0"         | 8"               | 8"                 | 11.5"         | A40, F60                         |

# ASPHALT SHORT TRACK CONTINUED

| ITEM NUMBER | TIRE SIZE       | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|-----------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 10184       | 8.0/27.5-15     | Slick         | 8.0"        | 27.3"        | 86.0"         | 8"               | 8"                 | 11.4"         | F70                              |
| 10215       | 26.5/8.0-15     | Street Tread  | 8.0"        | 26.5"        | 81.25"        | 8"               | 8"                 | 10.2"         | COMANCHE                         |
| 10220       | 26.5/8.0-15     | Street Tread  | 8.0"        | 26.5"        | 82.1"         | 8"               | 8"                 | 10.2"         | COMANCHE, 880, 895               |
| 10230       | 27.5/8.0-15     | Street Tread  | 8.0"        | 27.5"        | 85.3"         | 8"               | 8"                 | 10.7"         | COMANCHE                         |
| 10240       | 23.0/7.0-13 RIB | Rib Asphalt   | 6.6"        | 22.75"       | 71.5"         | 7"               | 7"                 | 9.3"          | 800                              |
| 10245       | 23.5/7.0-13 RIB | Rib Asphalt   | 6.6"        | 23.2"        | 73.0"         | 7"               | 7"                 | 9.1"          | 800                              |
| 10280       | 26.5/8.0-15 RIB | Rib Asphalt   | 8.0"        | 26.5"        | 82.0"         | 8"               | 8"                 | 10.75"        | 800                              |
| 10285       | 27.0/8.0-15 RIB | Rib Asphalt   | 8.0"        | 27.0"        | 84.5"         | 8"               | 8"                 | 11.25"        | 700, 800                         |
| 10290       | 27.5/8.0-15 RIB | Rib Asphalt   | 8.0"        | 27.5"        | 85.5"         | 8"               | 8"                 | 11.25"        | 700, 800                         |
| 10295       | 8.0/26.5-15     | Street Tread  | 9.0"        | 26.5"        | 83.2"         | 8"               | 8"                 | 11.0"         | 970                              |
| 10300       | 8.0/26.5-15     | Street Tread  | 9.0"        | 27.0"        | 84.0"         | 8"               | 8"                 | 11.0"         | 970                              |
| 10350       | 8.0/27.0-15     | Street Tread  | 9.0"        | 27.5"        | 86.3"         | 8"               | 8"                 | 11.0"         | 970                              |
| 10400       | 23.0/7.0-13     | Street Tread  | 7.0"        | 23.0"        | 72.2"         | 6"               | 6"                 | 8.6"          | 790                              |
| 10405       | 23.0/7.0-14     | Street Tread  | 7.0"        | 23.0"        | 72.2"         | 6"               | 6"                 | 8.6"          | 790                              |
| 10406       | 23.0/7.0-14     | Street Tread  | 7.0"        | 23.0"        | 72.2"         | 6"               | 6"                 | 8.6"          | 795                              |
| 10408       | 24.0/7.0-14     | Street Tread  | 7.0"        | 24.0"        | 75.0"         | 6"               | 6"                 | 9.1"          | 790                              |
| 10409       | 24.0x7.0-14     | Street Tread  | 7.0"        | 24.0"        | 75.0"         | 6"               | 6"                 | 9.1"          | 795                              |
| 10410       | 26.5/7.0-15     | Street Tread  | 7.0"        | 26.4"        | 83.0"         | 6"               | 6"                 | 9.1"          | 790                              |
| 10414       | 26.5/7.0-15     | Street Tread  | 7.0"        | 26.5"        | 84.0"         | 6"               | 6"                 | 9.2"          | 790, 850                         |
| 10415       | 27.0/7.0-15     | Street Tread  | 7.0"        | 27.0"        | 85.0"         | 6"               | 6"                 | 9.2"          | 790                              |
| 10416       | 27.0/7.0-15     | Street Tread  | 7.0"        | 27.0"        | 85.0"         | 6-7"             | 6"                 | 9.2"          | 850                              |
| 10420       | 26.5/8.0-15     | Street Tread  | 8.0"        | 26.5"        | 82.1"         | 8"               | 8"                 | 10.2"         | 880                              |
| 10425       | 27.5x8.0-15     | Street Tread  | 8.0"        | 27.5"        | 85.3"         | 8"               | 8"                 | 10.7"         | 880                              |
| 10430       | 8.0/26.5-15     | Street Tread  | 8.5"        | 26.4"        | 83.0"         | 8"               | 8"                 | 11.4"         | D800                             |
| 10435       | 8.0/26.5-15     | Street Tread  | 8.5"        | 26.9"        | 84.5"         | 8"               | 8"                 | 11.4"         | D800                             |
| 10440       | 8.0/27.0-15     | Street Tread  | 8.5"        | 27.2"        | 85.5"         | 8"               | 8"                 | 11.4"         | D800                             |
| 10620       | 27.5/10.0-15    | Slick         | 10.0"       | 27.3"        | 86.5"         | 10"              | 10"                | 13.2"         | F50                              |
| 10700       | 27.0/10.0-15 SX | Slick         | 10.0"       | 26.8"        | 84.0"         | 10"              | 10"                | 13.2"         | 3035                             |
| 10710       | 27.0/10.0-15 SH | Slick         | 10.0"       | 27.2"        | 85.0"         | 10"              | 10"                | 13.2"         | 3035                             |
| 10720       | 27.0/10.0-15    | Slick         | 10.0"       | 27.3"        | 86.5"         | 10"              | 10"                | 13.2"         | 3045, F80                        |
| 37130       | 8.0/27.0-15 L   | Slick         | 8.0"        | 26.8"        | 84.0"         | 8"               | 8"                 | 11.5"         | F53                              |
| 37140       | 8.0/27.0-15     | Slick         | 8.0"        | 27.3"        | 86.0"         | 8"               | 8"                 | 11.4"         | F53                              |
| 37170       | 10.0/23.0-13    | Slick         | 10.0"       | 23.0"        | 72.0"         | 10"              | 10"                | 12.5"         | F25, F45                         |
| 37180       | 10.0/27.0-15    | Slick         | 10.0"       | 26.2"        | 83.5"         | 10"              | 10"                | 13.2"         | F45                              |
| 37181       | 10.0/27.0-15 SX | Slick         | 10.0"       | 26.8"        | 84.0"         | 10"              | 10"                | 13.2"         | F45                              |
| 37190       | 10.0/27.0-15 SX | Slick         | 10.0"       | 26.8"        | 84.5"         | 10"              | 10"                | 13.2"         | F45                              |



REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## MODIFIED / SUPERS / SPRINT ASPHALT

| ITEM NUMBER | TIRE SIZE          | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|--------------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 08400       | 26.0/13.0-15       | Slick         | 13.0"       | 25.5"        | 80.5"         | 14-15"           | 15"                | 16.4"         | M20, M30                         |
| 08410       | 26.0/13.0-15       | Slick         | 13.0"       | 26.0"        | 81.5"         | 14-15"           | 15"                | 16.4"         | M20, M30                         |
| 08420       | 27.0/13.0-15       | Slick         | 13.0"       | 26.8"        | 84.0"         | 15"              | 15"                | 16.4"         | M30, M45, M450                   |
| 09120       | 11.0/24.0-15       | Slick         | 11.0"       | 23.2"        | 73.0"         | 10"              | 10"                | 13.0"         | 2010                             |
| 09121       | 11.0/24.0-15       | Slick         | 12.0"       | 24.1"        | 75.75"        | 12"              | 12"                | 13.0"         | 2030                             |
| 09125       | 11.0/24.5-15       | Slick         | 11.0"       | 24.5"        | 77.5"         | 10"              | 10"                | 12.5"         | M60                              |
| 09142       | 13.0/25.0-15       | Slick         | 13.0"       | 25.0"        | 78.0"         | 13-14"           | 13"                | 15.0"         | 2045                             |
| 09150       | 26.0/13.0-15       | Slick         | 13.0"       | 26.0"        | 81.5"         | 14-15"           | 15"                | 16.4"         | 2040                             |
| 09160       | 13.0/26.5-15       | Slick         | 13.0"       | 26.4"        | 82.5"         | 15"              | 15"                | 16.4"         | 2040                             |
| 09170       | 13.0/27.0-15       | Slick         | 13.0"       | 27.0"        | 84.2"         | 15"              | 15"                | 16.4"         | 2045                             |
| 09200       | 17.0/28.0-15       | Slick         | 17.0"       | 27.7"        | 86.5"         | 18"              | 18"                | 20.0"         | 2045                             |
| 09206       | 17.0/28.0-15       | Slick         | 17.0"       | 27.7"        | 86.5"         | 18"              | 18"                | 20.0"         | M40                              |
| 09209       | 17.0/28.0-15 (SC1) | Slick         | 17.0"       | 27.7"        | 86.5"         | 18"              | 18"                | 20.0"         | M55                              |



## LATE MODEL / E-MOD / STREET STOCK DIRT

| ITEM NUMBER | TIRE SIZE            | TREAD PATTERN    | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|----------------------|------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 36019       | G60-15 SH            | G60              | 8.5"        | 25.5"        | 81.0"         | 8"               | 8"                 | 10.75"        | IMCA                             |
| 36020       | G60-15               | G60              | 8.5"        | 26.0"        | 82.0"         | 8"               | 8"                 | 10.75"        | IMCA                             |
| 36021       | G60-15               | G60              | 8.5"        | 25.5"        | 81.0"         | 8"               | 8"                 | 10.75"        | Non Stamped                      |
| 36022       | G60-15               | G60              | 8.5"        | 26.0"        | 82.0"         | 8"               | 8"                 | 10.75"        | Non Stamped                      |
| 36040       | 22.5/8.0-13          | Large Crossblock | 8.0"        | 22.5"        | 69.5"         | 8-9"             | 8"                 | 9.75"         | USLCI, 1600                      |
| 36042       | 23.0/8.0-13          | Large Crossblock | 8.0"        | 23.0"        | 72.0"         | 8-9"             | 8"                 | 9.75"         | 1600                             |
| 36103       | 8.0/26.5-15          | Super Chain Link | 8.0"        | 26.5"        | 82.0"         | 8-9"             | 8"                 | 10.5"         | H 500, IMCA 500                  |
| 36105       | 8.0/27.0-15          | Super Chain Link | 8.0"        | 27.0"        | 84.0"         | 8-9"             | 8"                 | 10.5"         | H 500, IMCA 500                  |
| 36107       | 8.0/27.5-15          | Super Chain Link | 8.0"        | 27.4"        | 86.0"         | 8-9"             | 8"                 | 10.5"         | H 500                            |
| 36149       | 26.5/ 8.0-15         | Super Chain Link | 8.0"        | 26.5"        | 84.0"         | 8-9"             | 8"                 | 11.2"         | Soft, Medium 100, Medium         |
| 36156       | 27.5/ 8.0-15 NRM     | Super Chain Link | 8.0"        | 27.5"        | 86.5"         | 8-9"             | 8"                 | 11.3"         | Soft, Medium 100, Medium, Hard   |
| 36175       | 26.5/ 8.0-15 Wissota | Super Chain Link | 8.0"        | 26.5"        | 83.0"         | 8-9"             | 8"                 | 11.2"         | 35-W                             |
| 36180       | 26.5/ 8.0-15 Emod    | Super Chain Link | 8.0"        | 26.5"        | 83.0"         | 8-9"             | 8"                 | 11.2"         | M30S                             |
| 36185       | 27.5/ 8.0-15 Wissota | Super Chain Link | 8.0"        | 27.25"       | 85.5"         | 8-9"             | 8"                 | 11.2"         | 35-W                             |
| 36190       | 27.5/ 8.0-15 Emod    | Super Chain Link | 8.0"        | 27.25"       | 85.5"         | 8-9"             | 8"                 | 11.2"         | M30S, M60                        |
| 36240       | 28.0/10.5-15         | Chain Link       | 10.5"       | 28.0"        | 86.0"         | 10-12"           | 10"                | 13.5"         | RC4                              |
| 36310       | 29.0/10.5-15         | Chain Link       | 10.5"       | 29.0"        | 90.0"         | 10-12"           | 10"                | 13.5"         | RC4                              |
| 36606       | 28.5/11.0-15         | Angle Block      | 11.0"       | 28.5"        | 90.0"         | 12-14"           | 14"                | 14.5"         | USA21, RUSH25, RUSH55            |
| 36616       | 88.0/11.0-15         | Large Crossblock | 11.0"       | 28.0"        | 87.5"         | 12-14"           | 14"                | 14.75"        | USA21, RUSH25, RUSH55            |
| 36618       | 90.0/11.0-15         | Stagger Block    | 11.0"       | 28.2"        | 88.5"         | 12-14"           | 14"                | 15.5"         | FT200, FT400                     |
| 36621       | 90.0/11.0-15         | Large Crossblock | 11.0"       | 28.5"        | 89.0"         | 12-14"           | 14"                | 15.0"         | W30S                             |
| 36626       | 90.0/11.0-15         | Large Crossblock | 11.0"       | 28.5"        | 89.0"         | 12-14"           | 14"                | 15.0"         | USA21, USA55, RUSH25, RUSH55     |
| 36628       | 92.0/11.0-15         | Stagger Block    | 11.0"       | 29.3"        | 92.0"         | 12-14"           | 14"                | 15.5"         | FT200, FT400                     |

REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.



# LATE MODEL / E-MOD / STREET STOCK DIRT CONT.

| ITEM NUMBER | TIRE SIZE    | TREAD PATTERN    | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|--------------|------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 36631       | 92.0/11.0-15 | Large Crossblock | 11.0"       | 29.0"        | 92.0"         | 12-14"           | 14"                | 15.0"         | W30S                             |
| 36636       | 92.0/11.0-15 | Large Crossblock | 11.0"       | 29.0"        | 92.0"         | 12-14"           | 14"                | 15.0"         | USA21, USA55, RUSH25, RUSH55     |
| 36639       | 92.0/11.0-15 | Large Crossblock | 11.0"       | 29.0"        | 92.0"         | 12-14"           | 14"                | 15.0"         | D70                              |
| 36805       | 205/60-13    | Dirt Bozz Style  | 8.0"        | 22.6"        | 70.0"         | 7-8"             | 7"                 | 9.1"          | STARS Soft, STARS Med            |
| 36700       | 90.0/11.0-15 | Large Crossblock | 11.0"       | 28.5"        | 89.0"         | 12-14"           | 14"                | 15.0"         | NMLT1, NLMT2, NLMT3              |
| 36710       | 90.0/11.0-15 | Large Crossblock | 11.0"       | 29.0"        | 92.0"         | 12-14"           | 14"                | 15.0"         | NMLT1, NLMT2, NLMT3              |
| 36815       | 235/60-13    | Dirt Bozz Style  | 8.0"        | 23.8"        | 74.0"         | 7-8"             | 7"                 | 10.2"         | STARS Soft, STARS Med            |

**COMPOUND**

<<< **SOFT**
**FIRM** >>>

FT200  
STARS Soft  
USA21

Medium 100  
USA25

**G60**



FT400 USA55

1600 RC4

**LARGE CROSSBLOCK**



M30S

STARS Medium

**SUPER CHAIN LINK**



D70

**CHAIN LINK**



IMCA  
M60  
H 500

35-WIMCA 500

**ANGLE BLOCK**



**STAGGER BLOCK**



**WRS-2**



**DIRT BOZZ STYLE**



# EASTERN MODIFIED / 358 / SPORTSMAN DIRT

| ITEM NUMBER | TIRE SIZE         | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|-------------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 14131       | 11.0/82.0-15 SH   | Chain Link    | 10.5"       | 25.6"        | 80.5"         | 10-12"           | 10"                | 12.0"         | D300                             |
| 14133       | 11.0/82.0-15      | Chain Link    | 10.5"       | 26.0"        | 82.0"         | 10-12"           | 10"                | 12.0"         | D300                             |
| 14135       | 11.0/87.0-15      | Chain Link    | 11.0"       | 27.2"        | 85.5"         | 10-12"           | 12"                | 14.2"         | M45                              |
| 14145       | 11.0/90.0-15      | Chain Link    | 11.0"       | 29.0"        | 90.5"         | 10-13"           | 12"                | 14.5"         | M45, D60                         |
| 14151       | 13.0/82.0-15      | Chain Link    | 13.0"       | 26.3"        | 82.0"         | 12-14"           | 12"                | 14.0"         | D300, D400                       |
| 14177       | 13.0/87.0-15      | Chain Link    | 13.0"       | 27.5"        | 86.0"         | 12-14"           | 14"                | 16.2"         | D300, D400                       |
| 14189       | 13.0/89.0-15      | Chain Link    | 13.0"       | 28.0"        | 88.0"         | 12-14"           | 14"                | 16.2"         | D300, D400                       |
| 14229       | 13.0/92.0-15 Tall | Chain Link    | 13.0"       | 29.5"        | 92.5"         | 12-14"           | 14"                | 16.5"         | D300, D400, D500                 |

**COMPOUND**

<<< **SOFT**
**FIRM** >>>

D300

**CHAIN LINK**



M45

D400

D60

D500

REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## WING SPRINT DIRT

| ITEM NUMBER | TIRE SIZE         | TREAD PATTERN          | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|-------------------|------------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 38031       | 85.0/ 8.0-15      | Super Chain Link       | 8.0"        | 27.0"        | 84.5"         | 8"               | 8"                 | 10.5"         | D12                              |
| 38032       | 85.0/ 8.0-15      | Super Chain Link       | 8.0"        | 27.0"        | 85.0"         | 8"               | 8"                 | 10.5"         | D15, D20                         |
| 38126       | 88.0/15.0-15      | Large Checkerboard     | 15.0"       | 28.0"        | 88.0"         | 14-15"           | 15"                | 18.6"         | RD12                             |
| 38139       | 90.0/15.0-15      | Large Checkerboard     | 15.0"       | 28.5"        | 90.0"         | 14-15"           | 15"                | 18.0"         | RD12                             |
| 38120       | 8.0/27.5-15       | Super Chain Link       | 8.0"        | 27.4"        | 86.0"         | 8"               | 8"                 | 10.5"         | *RaceSaver                       |
| 38143       | 92.0/14.0-15      | Large Checkerboard     | 15.0"       | 29.0"        | 92.0"         | 14-15"           | 14"                | 18.0"         | *RaceSaver                       |
| 38149       | 92.0/15.0-15      | Sprint LR Checkerboard | 15.0"       | 29.0"        | 92.0"         | 14-15"           | 15"                | 18.5"         | D12A                             |
| 38151       | 93.0/15.0-15      | Sprint LR Checkerboard | 15.0"       | 29.6"        | 93.0"         | 14-15"           | 15"                | 18.3"         | D12A                             |
| 38153       | 94.0/14.0-15      | Large Checkerboard     | 15.0"       | 30.0"        | 94.0"         | 14-15"           | 14"                | 18.0"         | *RaceSaver                       |
| 38155       | 94.0/15.0-15      | Sprint LR Checkerboard | 15.0"       | 30.0"        | 94.0"         | 14-15"           | 15"                | 18.3"         | D12A                             |
| 38160       | 96.0/14.0-15      | Large Checkerboard     | 15.0"       | 30.5"        | 96.0"         | 14"              | 14"                | 18.5"         | *RaceSaver                       |
| 38168       | 96.0/15.0-15      | Sprint LR Checkerboard | 15.0"       | 30.5"        | 96.0"         | 14-15"           | 15"                | 18.7"         | D12A                             |
| 38214       | 104/16.0-15       | RaceSaver              | 16.0"       | 33.1"        | 104.0"        | 16-18"           | 17"                | 19.8"         | RaceSaver                        |
| 38223       | 105/16.0-15       | Sprint RR Checkerboard | 16.0"       | 33.2"        | 105.0"        | 16-18"           | 17"                | 20.3"         | D15A, MED                        |
| 38233       | 105/18.0-15 C2055 | Sprint RR Checkerboard | 18.0"       | 33.2"        | 105.0"        | 16-18"           | 18"                | 21.5"         | RD20, D25                        |
| 38230       | 105/18.0-15       | Large Checkerboard     | 18.0"       | 33.2"        | 105.0"        | 16-18"           | 18"                | 21.5"         | HTC                              |



## NON-WING SPRINT / SILVER CROWN SHORT TRACK DIRT

| ITEM NUMBER | TIRE SIZE         | TREAD PATTERN          | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|-------------------|------------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 38031       | 85.0/ 8.0-15      | Super Chain Link       | 8.0"        | 27.0"        | 84.5"         | 8"               | 8"                 | 10.5"         | D12                              |
| 38032       | 85.0/ 8.0-15      | Super Chain Link       | 8.0"        | 27.0"        | 85.0"         | 8"               | 8"                 | 10.5"         | D15, D20                         |
| 38233       | 105/18.0-15 C2055 | Large Checkerboard     | 18.0"       | 33.2"        | 105.0"        | 16-18"           | 18"                | 21.5"         | RD20, D25                        |
| 38144       | 92.0/14.0-15      | Large Checkerboard     | 15.0"       | 29.0"        | 92.0"         | 14-15"           | 14"                | 18.0"         | SC12                             |
| 38154       | 94.0/14.0-15      | Large Checkerboard     | 15.0"       | 30.0"        | 94.5"         | 14-15"           | 14"                | 18.0"         | SC12                             |
| 38161       | 96.0/14.0-15      | Large Checkerboard     | 15.0"       | 30.0"        | 96.0"         | 14-15"           | 14"                | 18.0"         | SC12                             |
| 38163       | 98.0/14.0-15      | Large Checkerboard     | 15.0"       | 31.5"        | 98.0"         | 14-15"           | 14"                | 18.0"         | SC12                             |
| 38164       | 100/13.0-15       | Checkerboard           | 15.0"       | 31.8"        | 100.0"        | 14-15"           | 14"                | 17.2"         | SC12                             |
| 38223       | 105/16.0-15       | Sprint RR Checkerboard | 16.0"       | 33.2"        | 105.0"        | 16-18"           | 17"                | 20.3"         | D15A, MED                        |



REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## SILVER CROWN DIRT / MILE TRACKS

| ITEM NUMBER      | TIRE SIZE         | TREAD PATTERN      | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|------------------|-------------------|--------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| <b>DIRT ONLY</b> |                   |                    |             |              |               |                  |                    |               |                                  |
| 38032            | 85.0/ 8.0-15      | Super Chain Link   | 8.0"        | 27.0"        | 84.5"         | 8"               | 8"                 | 10.5"         | D20, F75                         |
| 38207            | 103/14.0-15       | Large Checkerboard | 14.5"       | 32.1"        | 103.0"        | 14"              | 14"                | 18.5"         | D50                              |
| 38326            | 105/18.0-15 C2055 | Large Checkerboard | 18.0"       | 33.2"        | 105.0"        | 16-18"           | 21.5"              | 21.5"         | F85A, F95                        |



## MIDGET DIRT / MINI SPRINT / TQ MIDGET

| ITEM NUMBER | TIRE SIZE    | TREAD PATTERN    | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|--------------|------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 35112       | 68.0/ 7.0-13 | Midget Front     | 7.0"        | 21.6"        | 68.0"         | 7-8"             | 7"                 | 8.5"          | D12                              |
| 35113       | 68.0/ 7.0-13 | Midget Front     | 7.0"        | 21.8"        | 68.5"         | 7-8"             | 7"                 | 8.5"          | D15                              |
| 35140       | 74.0/10.0-13 | Small Crossblock | 10.0"       | 23.7"        | 73-74"        | 8-10"            | 8"                 | 11.7"         | D12                              |
| 35155       | 76.0/10.0-13 | Small Crossblock | 10.0"       | 24.2"        | 75-76"        | 8"               | 8"                 | 12.0"         | D12                              |
| 35161       | 77.0/10.0-13 | Small Crossblock | 10.0"       | 24.5"        | 77.0"         | 8-10"            | 8"                 | 12.0"         | D12                              |
| 35165       | 78.0/10.0-13 | Small Crossblock | 10.0"       | 24.8"        | 78.0"         | 8"               | 8"                 | 12.0"         | D12                              |
| 35172       | 80.0/10.0-13 | Small Crossblock | 10.0"       | 25.5"        | 79-80"        | 8"               | 8"                 | 12.0"         | D12, D20                         |
| 35234       | 82.0/12.0-13 | Large Crossblock | 12.0"       | 26.1"        | 82.0"         | 10-12"           | 10"                | 14.1"         | SP3                              |



# MODIFIED MIDGET / MICRO SPRINT DIRT / JR. SPRINT

| ITEM NUMBER | TIRE SIZE      | TREAD PATTERN    | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|----------------|------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 42050       | 57.0/ 6.0-10   | Micro Front      | 5.8"        | 18.0"        | 57.0"         | 5-6"             | 5"                 | 6.8"          | D12, D15                         |
| 42100       | 57.0/ 6.5-10   | Super Chain Link | 7.0"        | 18.0"        | 57.0"         | 7"               | 7"                 | 8.7"          | D12                              |
| 42124       | 59.0/ 8.0-10   | Large Crossblock | 8.5"        | 18.5"        | 58.5"         | 8"               | 8"                 | 9.5"          | RD12                             |
| 42164       | 61.0/ 8.0-10   | Large Crossblock | 8.2"        | 19.0"        | 60.5"         | 8"               | 8"                 | 10.1"         | RD15                             |
| 42168       | 61.0/10.0-10   | Large Crossblock | 10.2"       | 19.0"        | 60.5"         | 10"              | 10"                | 11.8"         | RD15, RD20                       |
| 42170       | 62.0/ 8.0-10   | Large Crossblock | 8.2"        | 19.7"        | 62.0"         | 8"               | 8"                 | 10.1"         | RD15                             |
| 42172       | 62.0/10.0-10   | Large Crossblock | 10.0"       | 19.7"        | 62.0"         | 10"              | 10"                | 11.9"         | RD15                             |
| 42173       | 63.0/ 8.0-10   | Large Crossblock | 8.2"        | 19.0"        | 63.0"         | 8"               | 8"                 | 10.1"         | RD15                             |
| 42183       | 63.0/10.0-10   | Large Crossblock | 10.0"       | 20.0"        | 63.0"         | 10"              | 10"                | 12.0"         | RD15, RD20                       |
| 42185       | 64.0/ 8.0-10   | Large Crossblock | 8.2"        | 20.2"        | 64.0"         | 8"               | 8"                 | 10.6"         | RD15                             |
| 42195       | 64.0/10.0-10   | Large Crossblock | 10.0"       | 20.2"        | 64.0"         | 10"              | 10"                | 12.5"         | RD15                             |
| 42225       | 65.0/10.0-10   | Crossblock       | 10.0"       | 20.5"        | 65.0"         | 10"              | 10"                | 11.5"         | RD15, RD20                       |
| 42237       | 69.0/10.0-10   | Crossblock       | 11.0"       | 22.0"        | 69.0"         | 10-12"           | 10"                | 12.5"         | RD20, D25                        |
| 42239       | 69.0/10.0 W-10 | Crossblock       | 12.5"       | 22.0"        | 69-70"        | 10-12"           | 11"                | 14.7"         | RD20, ASCS2                      |
| 42400       | 15.0/ 6.0-8    | Treaded CAB      | 6.0"        | 15.0"        | 49.0"         | 6"               | 6"                 | 7.4"          | RD20                             |
| 42450       | 15.0/ 7.0-8    | Small Crossblock | 7.0"        | 15.0"        | 49.0"         | 6"               | 6"                 | 7.5"          | RD20                             |
| 42500       | 15.0/ 8.0-8    | Small Crossblock | 8.0"        | 15.0"        | 49.5"         | 7"               | 7"                 | 8.5"          | RD20                             |
| 42550       | 16.0/ 8.5-8    | Small Crossblock | 8.5"        | 16.0"        | 53.5"         | 9"               | 9"                 | 10.5"         | RD20                             |

**SOFT** ← ← ←      **COMPOUND**      → → → **FIRM**

D12   RD15      D15   RD20      D25      ASCS2

**MICRO FRONT**  


**SUPER CHAIN LINK**  


**LARGE CROSSBLOCK**  


**CROSSBLOCK**  


**TREADED CAB**  


**SMALL CROSSBLOCK**  


# DIRT OVAL KARTING

| ITEM NUMBER   | TIRE SIZE    | TREAD PATTERN    | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|---|--------------|------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| <b>DIRT OVAL KART TIRES - Soft, Wet, Tacky Track</b>                      |              |                  |             |              |               |                  |                    |               |                                  |
| 11325   | 10.5 x 5.0-6 | Slick            | 4.75"       | 10.5"        | 32.75"        | 6.5"             | 6.5"               | 6.63"         | D20A, D30A                       |
| 11600   | 11.0 x 6.0-6 | Slick            | 6.0"        | 11.0"        | 33.0"         | 8.25-8.5"        | 8.5"               | 8.5"          | D20A, D30A                       |
| 11800   | 11.0 x 8.0-6 | Slick Right Side | 7.5"        | 11.0"        | 34.0"         | 10.0"            | 10.0"              | 10.13"        | D20A, D30A                       |
| <b>DIRT OVAL KART TIRES - Intermediate/Transitioning Track Conditions</b> |              |                  |             |              |               |                  |                    |               |                                  |
| 15500   | 10.5 x 5.0-6 | Slick            | 4.75"       | 10.5"        | 32.75"        | 6.5"             | 6.5"               | 6.625"        | A40                              |
| 15600   | 11.0 x 6.0-6 | Slick            | 6.0"        | 11.0"        | 33.0"         | 8.25-8.5"        | 8.5"               | 8.5"          | A40                              |
| 15800   | 11.0 x 8.0-6 | Slick Right Side | 7.5"        | 11.0"        | 34.0"         | 10.0"            | 10.0"              | 10.125"       | A40                              |
| <b>DIRT OVAL KART TIRES - Hard Track Conditions</b>                       |              |                  |             |              |               |                  |                    |               |                                  |
| 15456   | 10.5 x 4.5-6 | Slick            | 4.75"       | 10.5"        | 32.5"         | 6.5"             | 6.5"               | 6.6"          | FK                               |
| 15600   | 11.0 x 6.0-6 | Slick            | 6.0"        | 11.0"        | 33.0"         | 8.25-8.5"        | 8.5"               | 8.5"          | A40, FK                          |

**SOFT** ← ← ←      **COMPOUND**      → → → **FIRM**

D20A      D30A      A40      FK/FKSE

**SLICK**  


REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## TREADED KART

| ITEM NUMBER | TIRE SIZE    | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|--------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 11505       | 5.0/10.5-6   | Treaded Dirt  | 4.5"        | 10.5"        | 33.75"        | 5"               | 5.0"               | 5.75"         | D30A                             |
| 11850       | 11.5 x 8.0-6 | Treaded CB    | 8.0"        | 11.0"        | 36.0"         | 9-10"            | 10.0"              | 9.5"          | D10A, D20A, D30A, D50A           |
| 11900       | 11.0 x 5.5-6 | Treaded CAB   | 5.5"        | 11.0"        | 34.5"         | 6-6.5"           | 6.0"               | 6.375"        | D10A, D20A, D30A                 |
| 11901       | 11.0 x 5.5-6 | Treaded CAB   | 5.5"        | 11.0"        | 35.75"        | 5.5"             | 5.5"               | 6.375"        | RACE SAVER                       |
| 11920       | 11.0 x 6.5-6 | Treaded CAB   | 6.5"        | 11.0"        | 35.5"         | 6.5-8"           | 6.5"               | 7.125"        | D10A, D20A, D30A                 |
| 11930       | 11.0 x 6.0-6 | Treaded CAB   | 6.25"       | 11.0"        | 34.2"         | 6.5-8"           | 6.5"               | 6.75"         | D10A, D30A                       |
| 11939       | 12.0 x 8.0-6 | Treaded CB    | 8.0"        | 12.0"        | 38.5"         | 6.5"             | 6.5"               | 9.25"         | RACE SAVER                       |
| 11940       | 12.0 x 8.0-6 | Treaded CB    | 8.0"        | 12.0"        | 38.5"         | 6.5"             | 6.5"               | 9.25"         | D10A, D20A                       |
| 11941       | 12.0 x 8.0-6 | Treaded CB    | 8.0"        | 12.0"        | 37.5"         | 9-10"            | 10.0"              | 9.75"         | D30A                             |
| 11950       | 11.5 x 9.0-6 | Treaded CB    | 9.0"        | 12.0"        | 37.0"         | 9-10"            | 10.0"              | 10.25"        | D10A, D20A, D30A                 |
| 11960       | 12.0 x 9.0-6 | Treaded CB    | 9.0"        | 12.0"        | 38.5"         | 9-10"            | 10.0"              | 10.25"        | D10A, D20A, D30A                 |
| 11970       | 12.0 x 9.0-6 | Treaded CB    | 9.0"        | 12.0"        | 38.5"         | 9-10"            | 10.0"              | 10.25"        | D50A                             |



## ASPHALT OVAL KARTING

| ITEM NUMBER | TIRE SIZE    | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|--------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 15500       | 10.5 x 5.0-6 | Slick         | 4.50"       | 10.5"        | 33.125"       | 6-6.5"           | 6.0"               | 6.25"         | A40                              |
| 15656       | 11.0 x 6.5-6 | Slick         | 6.25"       | 11.0"        | 34.75"        | 8-9"             | 8.5"               | 8.625"        | A40                              |
| 15600       | 11.0 x 6.0-6 | Slick         | 6.0"        | 11.0"        | 33.0"         | 8.25-8.5"        | 8.5"               | 8.5"          | A40, FK                          |
| 15800       | 11.0 x 8.0-6 | Slick         | 7.875"      | 11.0"        | 34.0"         | 10"              | 10.0"              | 9.75"         | A40                              |



## ASPHALT QUARTER MIDGET

| ITEM NUMBER | TIRE SIZE         | TREAD PATTERN   | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|-------------------|-----------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 15031       | 31.0/4.5-5        | Slick           | 4.5"        | 10.25"       | 31.0"         | 5-6"             | 5.5"               | 5.5"          | A35                              |
| 15032       | 32.0/4.5-5        | Slick           | 4.5"        | 10.25"       | 32.0"         | 5-6"             | 5.5"               | 5.5"          | A35                              |
| 15033       | 32.0/4.5-5 SH     | Slick           | 4.5"        | 10.25"       | 31.5"         | 5-6"             | 5.5"               | 5.5"          | A35                              |
| <b>USAC</b> | <b>.25 MIDGET</b> | <b>POSITION</b> |             |              |               |                  |                    |               |                                  |
| 15325       | 33.0/5.0-6 NY1    | Right Front     | 4.5"        | 10.5"        | 33.125"       | 6-6.5"           | 6.0"               | 6.25"         | A35                              |
| 15650       | 34.5/6.5-6 NY1    | Right Rear      | 6.0"        | 11.0"        | 34.50"        | 8-8.5"           | 8.5"               | 8.25"         | A35                              |



**SLICK**



## DIRT QUARTER MIDGET

| ITEM NUMBER            | TIRE SIZE       | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|------------------------|-----------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 11031                  | 31.0/4.5-5      | Slick         | 4.5"        | 10.0"        | 31.0"         | 5-6"             | 5.5"               | 5.5"          | D10                              |
| 11032                  | 32.0/4.5-5      | Slick         | 4.5"        | 10.25"       | 32.0"         | 5-6"             | 5.5"               | 5.5"          | D10                              |
| <b>USAC .25 MIDGET</b> | <b>POSITION</b> |               |             |              |               |                  |                    |               |                                  |
| 11175                  | 33.0/5.0-6      | Right Front   | 4.5"        | 10.5"        | 33.125"       | 6-6.5"           | 6.0"               | 6.25"         | D10                              |
| 11225                  | 34.5/6.5-6      | Right Rear    | 6.25"       | 11.0"        | 34.5"         | 8-8.5"           | 8.5"               | 8.25"         | D10                              |



**SLICK**



## 5" SPRINT / SOLO KART

| ITEM NUMBER | TIRE SIZE  | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 22149       | 4.5/10.0-5 | Slick         | 4.25"       | 10.0"        | 32.0"         | 5.0-5.5"         | 5.0"               | 5.5"          | R55                              |
| 22150       | 4.5/10.0-5 | Slick         | 4.25"       | 10.0"        | 32.0"         | 5.0-5.5"         | 5.0"               | 5.5"          | R60A, R60B                       |
| 22155       | 4.5/10.0-5 | Slick         | 4.25"       | 10.0"        | 32.0"         | 5.0-5.5"         | 5.0"               | 5.5"          | R70                              |
| 22180       | 4.5/10.0-5 | Slick         | 4.25"       | 10.0"        | 32.0"         | 5.0-5.5"         | 5.0"               | 5.5"          | R80                              |
| 22250       | 6.0/11.0-5 | Slick         | 5.5"        | 11.0"        | 34.0"         | 7.0-7.25"        | 7.0"               | 7.25"         | R60A, R60B                       |
| 22260       | 6.0/11.0-5 | Slick         | 5.5"        | 11.0"        | 34.0"         | 7.0-7.25"        | 7.0"               | 7.25"         | R70, R80                         |

## 5" SPRINT / SOLO KART

| ITEM NUMBER | TIRE SIZE  | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 22368       | 7.1/11.0-5 | Slick         | 6.375"      | 11.0"        | 34.0"         | 8.0-8.25"        | 8.25"              | 8.5"          | R55                              |
| 22371       | 7.1/11.0-5 | Slick         | 6.375"      | 11.0"        | 34.0"         | 8.0-8.25"        | 8.25"              | 8.5"          | R60A, R60B                       |
| 22380       | 7.1/11.0-5 | Slick         | 6.375"      | 11.0"        | 34.0"         | 8.0-8.25"        | 8.25"              | 8.5"          | R70, R80                         |
| 22405       | 4.5/10.0-5 | Rain Front    | 4.25"       | 10.0"        | 32.25"        | 4.75"            | 4.75"              | 5.25"         | WET                              |



## SUPER KART & ENDURO

| ITEM NUMBER | TIRE SIZE         | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM |
|-------------|-------------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|
| 22460       | 4.6/10.5-6        | Slick         | 4.375"      | 10.5"        | 33.0"         | 5.0-6.0"         | 5.0"               | 5.5"          | R60B, R60                        |
| 22505       | 5.0/10.5-6 W3 CIK | Rain-Front    | 4.5"        | 10.5"        | 33.75"        | 4.75"            | 4.75"              | 5.75"         | W3                               |
| 22550       | 5.5/11.0-6 SK CIK | Slick         | 5.125"      | 11.0"        | 35.0"         | 4.75-6.0"        | 4.75"              | 5.75"         | R60B SK                          |
| 22650       | 6.5/11.0-6        | Slick         | 6.25"       | 11.0"        | 34.75"        | 7.0-8.0"         | 8.0"               | 8.1"          | R60B                             |
| 22710       | 7.1/11.5-6 W3 CIK | Rain-Rear     | 6.75"       | 11.5"        | 35.875"       | 8.0"             | 8.0"               | 8.25"         | W3                               |
| 22800       | 8.0/11.5-6 SK CIK | Slick         | 7.0"        | 11.5"        | 35.875"       | 8.0-9.0"         | 8.0"               | 8.25"         | R60B SK                          |



# DRAG RACING - BIAS

| ITEM NUMBER                 | TIRE SIZE           | TREAD PATTERN  | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND(S)    | TUBE ID |
|-----------------------------|---------------------|----------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------|---------|
| <b>DRAG FRONT</b>           |                     |                |             |              |               |                  |                    |               |                |         |
| 18085                       | 23.0X 5.0-15        | Drag Front     | 4.8"        | 23.0"        | 72.0"         | 3.5-4.0"         | 3.5"               | 5.5"          | Drag Front     |         |
| 18095                       | 24.0X 5.0-15        | Drag Front     | 4.8"        | 23.8"        | 75.0"         | 3.5-4.0"         | 3.5"               | 5.8"          | Drag Front     |         |
| 18100                       | 25.0X 4.5-15 PRO    | Drag Front     | 4.5"        | 25.0"        | 78.0"         | 3.5-4.0"         | 3.5"               | 5.75"         | Drag Front     |         |
| 18102                       | 25.0X 5.0-15        | Drag Front     | 4.8"        | 24.8"        | 77.9"         | 3.5-4.0"         | 3.5"               | 6.3"          | Drag Front     |         |
| 18103                       | 26.0X 4.5-17        | Drag Front     | 4.5"        | 26.3"        | 82.0"         | 3.5-4.5"         | 4.5"               | 5.8"          | Drag Front     |         |
| 18105                       | 26.0X 4.5-15        | Drag Front     | 4.3"        | 25.8"        | 81.0"         | 3.5-4.0"         | 3.5"               | 6.0"          | Drag Front     |         |
| 18106                       | 27.0X 4.5-15        | Drag Front     | 4.5"        | 27.0"        | 85.0"         | 3.5-4.0"         | 4.0"               | 6.8"          | Drag Front     |         |
| 18107                       | 28.0X 4.5-15        | Drag Front     | 4.5"        | 27.7"        | 87.0"         | 3.5-4.0"         | 4.0"               | 7.5"          | Drag Front     |         |
| 18108                       | 22.0X 2.5-17        | Dragster Front | 1.5"        | 22.0"        | 69.0"         | 2.5"             | 2.5"               | 2.7"          | Dragster Front |         |
| 18109                       | 27.5X 4.5-17        | Drag Front     | 4.8"        | 27.6"        | 86.5"         | 3.5-4.5"         | 4.5"               | 7.5"          | Drag Front     |         |
| 18112                       | 28.0X 4.5-18        | Drag Front     | 4.5"        | 28.0"        | 88.5"         | 3.5-5.0"         | 5.0"               | 7.25"         | Drag Front     |         |
| <b>DRIVE TIRES - SLICKS</b> |                     |                |             |              |               |                  |                    |               |                |         |
| 18060                       | 24.5/ 8.0-13        | Drag Slick     | 7.8"        | 24.3"        | 76.0"         | 6-8"             | 7"                 | 9.0"          | D06            | A       |
| 18110                       | 26.0/ 8.0-15        | Drag Slick     | 8.0"        | 26.1"        | 82.0"         | 7-8"             | 8"                 | 9.7"          | D06            | A       |
| 18115                       | 26.0/ 8.5-15*       | Drag Slick     | 9.0"        | 26.1"        | 82.0"         | 7-8"             | 8"                 | 10.3"         | C11            | A       |
| 18120                       | 26.0/ 9.0-15        | Drag Slick     | 9.0"        | 26.1"        | 82.0"         | 7-8"             | 8"                 | 10.5"         | D06            | A       |
| 18131                       | 26.0/10.0-15        | Drag Slick     | 10.0"       | 26.2"        | 82.0"         | 8-10"            | 9"                 | 11.0"         | D06            | A       |
| 18140                       | 28.0/ 9.0-15        | Drag Slick     | 9.0"        | 28.0"        | 88.0"         | 8-10"            | 8"                 | 11.1"         | D06            | A       |
| 18150                       | 28.0/10.0-15        | Drag Slick     | 10.0"       | 28.0"        | 88.0"         | 8-10"            | 8"                 | 11.3"         | D06            | A       |
| 18153                       | 28.0/10.0-16        | Drag Slick     | 10.0"       | 28.0"        | 88.0"         | 8-10"            | 10"                | 12.0"         | C07            | A       |
| 18154                       | 28.0/10.5-15*       | Drag Slick     | 10.2"       | 28.0"        | 88.0"         | 8-10"            | 10"                | 12.5"         | D05            | A       |
| 18155                       | 28.0/10.5-15*       | Drag Slick     | 10.2"       | 28.0"        | 88.0"         | 8-10"            | 10"                | 12.3"         | C07            | A       |
| 18156                       | 28.0/10.5-15W       | Drag Slick     | 10.9"       | 28.0"        | 88.0"         | 10-12"           | 10"                | 13.1"         | C07            | A       |
| 18157                       | 28.0/10.0-17        | Drag Slick     | 9.5"        | 28.0"        | 88.0"         | 8-10"            | 8"                 | 10.3"         | D06            | D       |
| 18158                       | 28.0/10.0-18        | Drag Slick     | 9.5"        | 28.0"        | 88.0"         | 8-10"            | 10"                | 11.0"         | D06            | D       |
| 18160                       | 29.0/ 9.0-15        | Drag Slick     | 9.0"        | 29.1"        | 91.5"         | 8-10"            | 8"                 | 11.3"         | D06, D07       | B       |
| 18170                       | 29.0/10.0-15        | Drag Slick     | 10.0"       | 29.1"        | 91.5"         | 8-10"            | 8"                 | 11.9"         | D06            | B       |
| 18175                       | 29.0/10.5-15 W*     | Drag Slick     | 11.0"       | 29.3"        | 92.0"         | 8-10"            | 10"                | 13.0"         | D06            | B       |
| 18180                       | 29.0/11.0-15        | Drag Slick     | 11.0"       | 29.3"        | 92.0"         | 8-10"            | 10"                | 13.2"         | D06            | B       |
| 18190                       | 29.0/12.0-15        | Drag Slick     | 12.0"       | 29.3"        | 92.0"         | 10-12"           | 10"                | 13.7"         | D06            | B       |
| 18192                       | 29.5/10.5-15        | Drag Slick     | 11.1"       | 30.6"        | 96.0"         | 10-12"           | 10"                | 13.2"         | D06            | B       |
| 18194                       | 29.5/10.5S-15*      | Drag Slick     | 10.5"       | 29.5"        | 94.0"         | 8-10"            | 10"                | 13.3"         | C06            | B       |
| 18195                       | 29.5/11.5-15 W*     | Drag Slick     | 13.5"       | 30.6"        | 96.0"         | 12-14"           | 12"                | 15.0"         | D06            | B       |
| 18200                       | 30.0/ 9.0-15        | Drag Slick     | 9.0"        | 30.0"        | 94.0"         | 8-10"            | 8"                 | 11.5"         | D05, D07       | B       |
| 18205                       | 30.0/10.5-15        | Drag Slick     | 10.5"       | 30.0"        | 94.0"         | 8-10"            | 10"                | 13.3"         | D05            | B       |
| 18220                       | 30.5/10.5-15        | Drag Slick     | 10.5"       | 30.5"        | 97.0"         | 10-12"           | 12"                | 14.5"         | C07            | B       |
| 18235                       | 31.5/12.5-15 W*     | Drag Slick     | 13.5"       | 31.7"        | 99.5"         | 12-14"           | 14"                | 17.0"         | D05            | B       |
| 18237                       | 13.5/31.5-15L***    | Drag Slick     | 13.5"       | 31.7"        | 99.5"         | 12-14"           | 14"                | 17.2"         | C07            | B       |
| 18240                       | 31.0/14.0-15        | Drag Slick     | 14.0"       | 31.2"        | 98.0"         | 12-14"           | 12"                | 16.5"         | D05            | C       |
| 18242                       | 32.0/12.0-15        | Drag Slick     | 12.2"       | 32.0"        | 101.0"        | 10-12"           | 12"                | 16.0"         | D05            | C       |
| 18243                       | 32.0/13.0-15        | Drag Slick     | 13.2"       | 32.0"        | 101.0"        | 12-13"           | 12"                | 16.5"         | D05            | C       |
| 18245                       | 32.0/13.5-15 W*     | Drag Slick     | 14.0"       | 32.3"        | 102.0"        | 12-14"           | 14"                | 17.5"         | D05            | C       |
| 18250                       | 32.0/14.0-15        | Drag Slick     | 14.0"       | 32.3"        | 102.0"        | 12-14"           | 14"                | 17.5"         | D05            | C       |
| 18255                       | 14.0/32.0-15 L***   | Drag Slick     | 14.0"       | 32.3"        | 102.0"        | 12-14"           | 14"                | 17.5"         | C07            | C       |
| 18260                       | 32.0/14.5-15 W*     | Drag Slick     | 15.0"       | 32.6"        | 102.5"        | 14-15"           | 14"                | 18.0"         | D05            | C       |
| 18265                       | 14.5/32.0-15 L***   | Drag Slick     | 15.0"       | 32.3"        | 102.0"        | 14-15"           | 14"                | 18.0"         | C07            | C       |
| 18300                       | 32.5/16.5-15*       | Drag Slick     | 16.7"       | 32.3"        | 101.5"        | 15-16"           | 15"                | 19.5"         | C07            | C       |
| 18332                       | 33.0/10.5-15 Outlaw | Drag Slick     | 10.8"       | 33.0"        | 104.0"        | 10-12"           | 12"                | 15.5"         | C11            | C       |
| 18336                       | 33.0/10.5W-16       | Drag Slick     | 11.3"       | 33.0"        | 104.0"        | 16"              | 16"                | 17.3"         | C11            | C       |
| 18350                       | 33.0/12.0-15        | Drag Slick     | 12.2"       | 33.0"        | 102.0"        | 10-12"           | 10"                | 15.3"         | C09            | C       |
| 18355                       | 33.0/13.0-15        | Drag Slick     | 13.2"       | 33.0"        | 102.0"        | 12-13"           | 12"                | 16.7"         | C06            | C       |
| 18367                       | 14.5/33.0-15 L***   | Drag Slick     | 14.5"       | 33.0"        | 104.0"        | 14-16"           | 14"                | 17.8"         | C07            | C       |
| 18370                       | 33.0/15.0-15        | Drag Slick     | 15.0"       | 33.0"        | 104.0"        | 14-15"           | 14"                | 18.3"         | D05            | C       |
| 18372                       | 33.0/15.0S-15*      | Drag Slick     | 15.0"       | 33.0"        | 104.0"        | 14-15"           | 15"                | 18.5"         | D06            | C       |
| 18400                       | 33.0/16.0-15*       | Drag Slick     | 17.0"       | 33.0"        | 104.0"        | 15-16"           | 15"                | 19.8"         | D05, D06, C07  | C       |
| 18450                       | 33.0/16.5-15 S**    | Drag Slick     | 17.0"       | 33.0"        | 104.0"        | 15-16"           | 15"                | 19.8"         | D06            | C       |

REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.



## DRAG RACING - BIAS CONTINUED

| ITEM NUMBER | TIRE SIZE     | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH   | SECTION WIDTH | COMPOUND(S)  | TUBE ID |
|-------------|---------------|---------------|-------------|--------------|---------------|------------------|----------------------|---------------|--------------|---------|
| 18500       | 33.0/17.0-16* | Drag Slick    | 17.0"       | 33.0"        | 104.0"        | 15-16"           | 15"                  | 19.8"         | C07          | C       |
| 18600       | 33.5/16.0-15* | Drag Slick    | 17.0"       | 33.6"        | 106.0"        | 15-16"           | 15"                  | 19.5"         | C07          | C       |
| 18650       | 33.5/17.0-16* | Drag Slick    | 17.0"       | 33.6"        | 106.0"        | 15-16"           | 16"                  | 19.5"         | C07          | C       |
| 18700       | 33.5/17.0-16  | Drag Slick    | 17.0"       | 33.6"        | 106.0"        | 15-16"           | 16"                  | 20.3"         | C06          | A*      |
| 18705       | 33.5/17.0-16  | Drag Slick    | 17.0"       | 33.6"        | 106.0"        | 15-16"           | 16"                  | 20.3"         | C35          | A*      |
| 18740       | 34.0/14.0-16  | Drag Slick    | 14.0"       | 34.0"        | 108.0"        | 13-16"           | *16"(*Beadlock Only) | 18.3"         | C1350        |         |
| 18750       | 35.0/15.0-16  | Drag Slick    | 15.0"       | 35.0"        | 110.0"        | 14-16"           | 16"                  | 18.6"         | C1450        |         |
| 18760       | 14.0/35.0-16  | Drag Slick    | 14.0"       | 35.0"        | 110.0"        | 15-16"           | 16"                  | 19.2"         | BR3          |         |
| 18770       | 15.0/34.5-16  | Drag Slick    | 15.0"       | 35.0"        | 110.0"        | 15-16"           | 16"                  | 19.5"         | C1550        |         |
| 18780       | 17.0/34.5-16  | Drag Slick    | 17.0"       | 35.0"        | 110.0"        | 15-16"           | 16"                  | 20.0"         | C2055, N2021 | A*      |
| 18790       | 34.5/17.0-16  | Drag Slick    | 17.0"       | 35.0"        | 110.0"        | 15-16"           | 16"                  | 21.0"         | W2021        | A*      |
| 18910       | 17.0/36.0-16  | Drag Slick    | 17.0"       | 36.2"        | 112.5"        | 15-16"           | 16"                  | 20.5"         | C2021, C2055 | A*      |
| 18950       | 7.0/29.0-15   | Drag Master   | 7.0"        | 29.0"        | 91.0"         | 6-8"             | 7"                   | 10.4"         | DRAG         | A       |

\*STIFF SIDEWALL - \*\*SOFT SIDEWALL - \*\*\*LIGHTWEIGHT

| SOFT                |            |            | COMPOUND |     |            |     |      |                                     | FIRM       |  |
|---------------------|------------|------------|----------|-----|------------|-----|------|-------------------------------------|------------|--|
| PRO 8, 9, 10<br>D05 | DBR<br>D06 | DR2<br>C35 | C06      | BR3 | C07<br>C09 | C11 | DRAG | C1550/C2055<br>D07C2021/N2021/W2021 | Drag Front |  |

**DRAGSTER FRONT**



**DRAG SLICK**



**DRAG MASTER**



## DRAG RACING - RADIAL

| ITEM NUMBER | TIRE SIZE               | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND(S) |
|-------------|-------------------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|-------------|
| 18198       | 29.5/10.5R-15 Radial*** | Drag Slick    | 10.5"       | 29.9"        | 94.0"         | 8-10"            | 10"                | 12.5"         | C06         |
| 18209       | 30.0/ 9.0R-15 Radial*** | Drag Slick    | 9.0"        | 29.5"        | 92.5"         | 8-10"            | 8"                 | 11.0"         | C06         |
| 18210       | 30.0/ 9.0R-15 Radial    | Drag Slick    | 9.0"        | 29.5"        | 92.5"         | 8-10"            | 8"                 | 11.0"         | C07         |
| 18212       | 9.0/30.0R-15 Radial***  | Drag Slick    | 9.0"        | 29.9"        | 94.0"         | 8-10"            | 8"                 | 11.0"         | C06         |
| 18213       | 9.0/30.0R-15 Radial***  | Drag Slick    | 9.9"        | 30.0"        | 94.0"         | 9-10"            | 10"                | 12.2"         | C30         |
| 18214       | 30.0/10.5R-15 Radial*** | Drag Slick    | 10.5"       | 29.5"        | 92.5"         | 9-10"            | 10"                | 12.5"         | C06         |
| 18215       | 30.0/10.5R-15 Radial    | Drag Slick    | 10.5"       | 29.5"        | 92.5"         | 9-10"            | 10"                | 12.5"         | C07         |
| 18239       | 31.5/13.5R-15 Radial    | Drag Slick    | 13.5"       | 31.8"        | 99.7"         | 14-15"           | 14"                | 16.3"         | C06         |
| 18247       | 32.0/13.5R-15 Radial    | Drag Slick    | 13.5"       | 32.2"        | 101.5"        | 14-15"           | 14"                | 16.8"         | C06         |



REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## DRAG BRACKET RADIAL CONTINUED

| ITEM NUMBER | TIRE SIZE     | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND(S) |
|-------------|---------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|-------------|
| 18805DBR    | 26.0/8.5 R15  | Drag Slick    | 8.5"        | 26.2"        | 82.5"         | 8-9"             | 8.0"               | 10.2"         | DBR         |
| 18810DBR    | 26.0/10.0 R15 | Drag Slick    | 10.5"       | 26.2"        | 82.5"         | 9-11"            | 9.0"               | 11.7"         | DBR         |
| 18815DBR    | 28.0/ 9.0 R15 | Drag Slick    | 9.5"        | 28.0"        | 88.25"        | 8-10"            | 8.0"               | 11.1"         | DBR         |
| 18820DBR    | 28.0/10.5 R15 | Drag Slick    | 10.5"       | 28.0"        | 88.5"         | 10-12"           | 10.0"              | 12.7"         | DBR         |
| 18825DBR    | 28.0/10.5 R17 | Drag Slick    | 10.5"       | 28.0"        | 88.5"         | 10-11"           | 10.0"              | 11.5"         | DBR         |
| 18830DBR    | 28.0/10.5 R18 | Drag Slick    | 10.5"       | 28.0"        | 88.5"         | 10-11"           | 10.0"              | 11.5"         | DBR         |
| 18835DBR    | 29.5/10.5 R15 | Drag Slick    | 10.5"       | 29.5"        | 93.5"         | 9.5-12"          | 10.0"              | 13.2"         | DBR         |
| 18837DBR    | 29.5/10.5 R17 | Drag Slick    | 10.9"       | 29.8"        | 93.9"         | 9.5-12"          | 9.5"               | 12.1"         | DBR         |
| 18840DBR    | 29.5/10.5 R18 | Drag Slick    | 10.5"       | 29.5"        | 93.5"         | 9.5-12"          | 10.0"              | 13.2"         | DBR         |
| 18845DBR    | 29.5/11.5 R18 | Drag Slick    | 11.6"       | 29.8"        | 93.8"         | 10-12"           | 11.0"              | 13.3"         | DBR         |
| 18850DBR    | 29.5/11.5 R20 | Drag Slick    | 11.6"       | 29.9"        | 93.9"         | 10-12"           | 11.0"              | 12.9"         | DBR         |
| 18860DBR    | 31.0/11.5 R15 | Drag Slick    | 11.5"       | 31.4"        | 98.75"        | 12-14"           | 14.0"              | 16.0"         | DBR         |

### DRAG SLICK



## JR DRAGSTER

| ITEM NUMBER | TIRE SIZE    | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND      |
|-------------|--------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|---------------|
| 18010       | 16.0/ 1.5-12 | Jr. Front     | 1.0"        | 16.0"        | 50.0"         | 1.0-1.5"         | 1.5"               | 1.7"          | TUBE REQUIRED |
| 18031       | 18.0/ 8.0-8  | Drag Slick    | 7.7"        | 17.7"        | 55.0"         | 7-8"             | 8"                 | 9.9"          | PRO 8         |
| 18036       | 18.0/ 9.0-8  | Drag Slick    | 8.5"        | 17.7"        | 55.5"         | 8-9"             | 8"                 | 10.25"        | PRO 9         |
| 18041       | 18.0/10.0-8  | Drag Slick    | 9.5"        | 17.7"        | 55.0"         | 8-10"            | 8"                 | 10.6"         | PRO10         |

\*Tube required Summit JRC-654-431 or JEGS 574-654-438

### JR FRONT



### DRAG SLICK



## D.O.T. DRAG - RADIAL

| ITEM NUMBER | TIRE SIZE  | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND |
|-------------|------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------|
| 17310DR2    | P225/50R15 | DR2           | 8.5"        | 23.9"        | 75.2"         | 7-9"             | 7"                 | 9.5"          | DR2      |
| 17313DR2    | P295/55R15 | DR2           | 11.0"       | 27.6"        | 86.7"         | 8-10"            | 9.5"               | 12.5"         | DR2      |
| 17314DR2    | P235/60R15 | DR2           | 8.4"        | 26.2"        | 82.3"         | 7-9"             | 7"                 | 10.0"         | DR2      |
| 17315DR2    | P275/50R15 | DR2           | 9.5"        | 25.6"        | 80.5"         | 8-10"            | 8.5"               | 10.8"         | DR2      |
| 17316DR2    | P295/65R15 | DR2           | 10.0"       | 30.0"        | 94.5"         | 8-10"            | 8.5"               | 12.0"         | DR2      |
| 17317       | P275/60R15 | DOT           | 9.8"        | 27.7"        | 87.0"         | 8-10"            | 8"                 | 11.5"         | DOT      |
| 17318DR2    | P325/50R15 | DR2           | 11.75"      | 27.7"        | 87.0"         | 9-11"            | 10"                | 13.5"         | DR2      |
| 17320DR2    | P225/50R16 | DR2           | 8.4"        | 24.9"        | 78.2"         | 7-9"             | 7"                 | 9.3"          | DR2      |
| 17325DR2    | P255/50R16 | DR2           | 9.3"        | 26.1"        | 82.0"         | 8-10"            | 8"                 | 10.7"         | DR2      |

REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## D.O.T. DRAG - RADIAL CONTINUED

| ITEM NUMBER | TIRE SIZE  | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND |
|-------------|------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------|
| 17326DR2    | P295/50R16 | DR2           | 10.5"       | 27.7"        | 87.0"         | 8-10"            | 9"                 | 12.7"         | DR2      |
| 17327DR2    | P225/45R17 | DR2           | 8.3"        | 24.9"        | 78.3"         | 7-8.5"           | 8"                 | 9.7"          | DR2      |
| 17328DR2    | P245/45R17 | DR2           | 9.2"        | 26.0"        | 81.7"         | 7.5-9"           | 8"                 | 10.0"         | DR2      |
| 17330DR2    | P275/40R17 | DR2           | 10.0"       | 25.8"        | 81.0"         | 9-11"            | 10"                | 11.0"         | DR2      |
| 17332DR2    | P315/35R17 | DR2           | 11.5"       | 25.9"        | 81.3"         | 9-11"            | 11"                | 12.6"         | DR2      |
| 17335DR2    | P335/35R17 | DR2           | 12.0"       | 25.9"        | 81.3"         | 11-13"           | 12"                | 13.5"         | DR2      |
| 17340DR2    | P245/40R18 | DR2           | 8.8"        | 26.0"        | 81.5"         | 7-9"             | 9"                 | 10.3"         | DR2      |
| 17342DR2    | P315/30R18 | DR2           | 11.0"       | 26.0"        | 81.5"         | 11-12"           | 11"                | 12.5"         | DR2      |
| 17343DR2    | P325/45R18 | DR2           | 10.6"       | 30.2"        | 94.3"         | 10-12"           | 11"                | 13.1"         | DR2      |
| 17345DR2    | P335/30R18 | DR2           | 12.2"       | 25.9"        | 81.3"         | 12-13"           | 12"                | 13.4"         | DR2      |
| 17375DR2    | P275/60R15 | DR2           | 10.0"       | 28.0"        | 88.8"         | 8-10"            | 10"                | 12.7"         | DR2      |

**WARNING:** DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for racing and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.



**DR2**

## QUICK TIME PRO D.O.T.

| ITEM NUMBER | TIRE SIZE        | TREAD PATTERN  | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | TUBE ID |
|-------------|------------------|----------------|-------------|--------------|---------------|------------------|--------------------|---------------|---------|
| 17415       | 26 x 9.50-15 LT  | Quick Time Pro | 8.0"        | 26.1"        | 82.0"         | 6-8"             | 8"                 | 10.0"         | A       |
| 17421       | 26 x 11.50-15 LT | Quick Time Pro | 10.0"       | 26.1"        | 82.0"         | 8-10"            | 8"                 | 10.8"         | A       |
| 17431       | 26 x 9.50-16 LT  | Quick Time Pro | 8.0"        | 26.1"        | 82.0"         | 6-8"             | 8"                 | 9.3"          | A       |
| 17500       | 27 x 10.50-15 LT | Quick Time Pro | 9.0"        | 27.1"        | 85.0"         | 8-10"            | 8"                 | 10.5"         | A       |
| 17510       | 27 x 11.50-15 LT | Quick Time Pro | 10.0"       | 27.1"        | 85.0"         | 8-10"            | 8"                 | 11.3"         | A       |
| 17601       | 28 x 11.50-15 LT | Quick Time Pro | 10.0"       | 27.9"        | 87.5"         | 8-10"            | 8"                 | 11.2"         | A       |
| 17604       | 28 x 11.50-17 LT | Quick Time Pro | 9.75"       | 28.5"        | 89.0"         | 8-10"            | 10"                | 13.1"         | D       |
| 17606       | 28 x 13.50-15 LT | Quick Time Pro | 11.0"       | 27.8"        | 87.3"         | 10-12"           | 10"                | 12.8"         | A       |
| 17611       | 28 x 14.50-15 LT | Quick Time Pro | 12.0"       | 27.7"        | 87.0"         | 10-12"           | 10"                | 13.3"         | A       |
| 17652       | 28 x 14.50-17 LT | Quick Time Pro | 11.75"      | 28.5"        | 89.0"         | 10-12"           | 11"                | 13.5"         | A       |
| 17702       | 29 x 12.50-15 LT | Quick Time Pro | 10.0"       | 29.0"        | 91.0"         | 8-10"            | 10"                | 12.8"         | B       |
| 17705       | 29 x 13.50-15 LT | Quick Time Pro | 11.0"       | 29.0"        | 91.0"         | 10-12"           | 10"                | 13.3"         | B       |
| 17710       | 29 x 14.50-15 LT | Quick Time Pro | 12.0"       | 29.2"        | 91.8"         | 10-12"           | 10"                | 13.8"         | B       |
| 17795       | 31 x 14.50-15 LT | Quick Time Pro | 11.0"       | 30.6"        | 96.0"         | 10-12"           | 10"                | 14.3"         | C       |
| 17800       | 31 x 16.50-15 LT | Quick Time Pro | 13.1"       | 30.9"        | 97.0"         | 12-14"           | 12"                | 15.8"         | C       |
| 17810       | 31 x 18.50-15 LT | Quick Time Pro | 15.0"       | 30.9"        | 97.0"         | 14-15"           | 14"                | 17.8"         | C       |
| 17900       | 33 x 18.50-15 LT | Quick Time Pro | 15.0"       | 33.0"        | 103.5"        | 14-15"           | 14"                | 18.5"         | C       |
| 17910       | 33 x 22.50-15 LT | Quick Time Pro | 17.0"       | 33.4"        | 105.0"        | 15-16"           | 15"                | 19.3"         | C       |



**WARNING:** DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for making and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.



**QUICK TIME PRO**

## QUICK TIME D.O.T.

| ITEM NUMBER | TIRE SIZE        | TREAD PATTERN    | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | TUBE ID |
|-------------|------------------|------------------|-------------|--------------|---------------|------------------|--------------------|---------------|---------|
| 17050       | P245/60D-15      | Super Chain Link | 8.0"        | 26.2"        | 82.3"         | 6-8"             | 8"                 | 10.2"         | A       |
| 17110       | P275-60D-15      | Super Chain Link | 9.0"        | 27.3"        | 85.8"         | 8-10"            | 8"                 | 11.3"         | A       |
| 17125       | P295/60D-15      | Super Chain Link | 10.0"       | 29.6"        | 93.0"         | 8-10"            | 8"                 | 12.0"         | B       |
| 17130       | P325/50D-15      | Super Chain Link | 10.5"       | 28.1"        | 88.3"         | 8-10"            | 8"                 | 12.5"         | A       |
| 17140       | 31 x 16.50-15 LT | Super Chain Link | 14.0"       | 30.7"        | 96.5"         | 12-14"           | 14"                | 17.8"         | B       |
| 17150       | 31 x 18.50-15 LT | Super Chain Link | 15.0"       | 31.1"        | 97.5"         | 14-15"           | 14"                | 18.0"         | C       |

**WARNING:** DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for racing and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.

### SUPER CHAIN LINK



## RACING TUBES & LINER

| ITEM NUMBER | TUBE SIZE        |  | TUBE ID                     |
|-------------|------------------|--|-----------------------------|
| 288088-15   | 80/ 88-15 TUBE   | WILL FIT 80" TO 88" CIRC.                      | 6" TO 11" TREAD WIDTH<br>A  |
| 288088-17   | 80/ 88-17 TUBE   | WILL FIT 80" TO 88" CIRC.                      | 6" TO 11" TREAD WIDTH<br>D  |
| 2886100-15  | 86/100-15 TUBE   | WILL FIT 86" TO 100" CIRC.                     | 11" TO 13" TREAD WIDTH<br>B |
| 2894106-15  | 94/106-15 TUBE   | WILL FIT 94" TO 106" CIRC.                     | 15" TO 19" TREAD WIDTH<br>C |
| 32401       | 75/16.0-16 LINER | FOR USE WITH ITEM NUMBERS 18780, 18790 & 18910 | A*                          |

## PRO STREET D.O.T. - RADIALS

| ITEM NUMBER  | TIRE SIZE         | SPEED RATING | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | MAX LOAD | RATED INF. PSI | LOAD RANGE |
|--------------|-------------------|--------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------|----------------|------------|
| <b>FRONT</b> |                   |              |               |             |              |               |                  |                    |               |          |                |            |
| 19030        | 24 x 7.50R-15 LT  | 71H          | Pro Street    | 5.3"        | 23.2"        | 72.8"         | 5.5-7.0"         | 6.0"               | 7.5"          | 760      | 35             | B          |
| 19040        | 25 x 7.50R-15 LT  | 75H          | Pro Street    | 5.3"        | 24.3"        | 76.4"         | 5.5-7.0"         | 6.0"               | 7.5"          | 855      | 35             | B          |
| 19050        | 26 x 7.50R-15 LT  | 79H          | Pro Street    | 5.3"        | 25.3"        | 80.3"         | 5.5-7.0"         | 6.0"               | 7.5"          | 965      | 35             | B          |
| 19055        | 26 x 7.50R-17 LT  | 74H          | Pro Street    | 5.3"        | 25.4"        | 80.4"         | 5.5-7.0"         | 6.0"               | 7.5"          | 825      | 35             | B          |
| 19070        | 27 x 9.50R-15 LT  | 90H          | Pro Street    | 8.0"        | 26.5"        | 84.0"         | 6.5-8.5"         | 8.0"               | 10.0"         | 1325     | 35             | B          |
| 19075        | 27 x 10.50R-15 LT | 88H          | Pro Street    | 8.3"        | 26.1"        | 82.4"         | 7-9.0"           | 8.5"               | 10.5"         | 1235     | 35             | B          |
| 19155        | 29 x 12.50R-15 LT | 97H          | Pro Street    | 10.2"       | 29.1"        | 91.5"         | 9.0-11.5"        | 10.0"              | 13.0"         | 1610     | 35             | C          |
| 19200        | 29 x 15.50R-15 LT | 99H          | Pro Street    | 12.1"       | 28.7"        | 91.5"         | 11-14"           | 12.0"              | 15.3"         | 1710     | 35             | C          |
| 19250        | 29 x 18.50R-15 LT | 101H         | Pro Street    | 14.6"       | 28.4"        | 90.8"         | 13-16.5"         | 14.0"              | 18.0"         | 1820     | 35             | C          |
| 19275        | 31 x 12.50R-15 LT | 103H         | Pro Street    | 10.3"       | 30.5"        | 96.0"         | 9.0-11.5"        | 10.0"              | 13.5"         | 1930     | 35             | C          |
| 19276        | 31 x 12.50R-16 LT | 101H         | Pro Street    | 10.3"       | 30.5"        | 96.0"         | 9.0-11.5"        | 10.0"              | 12.8"         | 1820     | 35             | C          |
| 19300        | 31 x 16.50R-15 LT | 106H         | Pro Street    | 12.8"       | 30.6"        | 96.2"         | 11.5-15"         | 12.0"              | 16.0"         | 2095     | 35             | C          |
| 19350        | 31 x 18.50R-15 LT | 108H         | Pro Street    | 14.5"       | 30.6"        | 96.2"         | 13-16.5"         | 14.0"              | 18.0"         | 2205     | 35             | C          |
| 19390        | 32 x 21.50R-15 LT | 115H         | Pro Street    | 16.8"       | 31.7"        | 100.0"        | 15-19.5"         | 17.0"              | 21.5"         | 2680     | 35             | C          |

WARNING: "Pro Street Tires are designed for highway use and are not suitable for racing purposes."

NOTE: H Speed Rating = 130 mph/210 km/h.

### PRO STREET



REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES. FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## CIRCUIT RACING SLICKS - BIAS

| ITEM NUMBER | TIRE SIZE           | APPLICATION        | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND SOFT TO FIRM |
|-------------|---------------------|--------------------|-------------|--------------|---------------|------------------|--------------------|---------------|-----------------------|
| 43100       | 18.0 x 6.0-10       | F500               | 6.2"        | 18.1"        | 57.0"         | 6"               | 6"                 | 8.1"          | R20, R35B             |
| 43104       | 18.0 x 7.5-10       | F500               | 7.5"        | 18.3"        | 57.5"         | 7-8"             | 8"                 | 9.5"          | R20, R35B             |
| 43130       | 20.0 x 6.0-13       | CF                 | 6.0"        | 20.7"        | 65.0"         | 5.5-6.5"         | 5.5"               | 7.0"          | R60A                  |
| 43140       | 20.0 x 7.0-13       | Sidecar            | TBD         | TBD          | TBD           | 6-8.0"           | TBD                | TBD           | R20                   |
| 43164       | 20.5 x 7.0-13       | FB, FC, FM, SR     | 6.75"       | 21.0"        | 66.2"         | 6-8"             | 6"                 | 8.0"          | R20, R35B, R60A       |
| 43167       | 20.0 x 7.5-13       | SR, Sidecar        | 8.0"        | 20.6"        | 65.0"         | 6-9"             | 8"                 | 9.4"          | R20, R35B             |
| 43173       | 20.0 x 8.0-13 CL    | FP, HP, GT3, GTL   | 8.2"        | 19.8"        | 63.5"         | 5-6"             | 6"                 | 9.2"          | MS                    |
| 43187       | 20.0 x 9.0-13       | FA, SR             | 9.75"       | 20.6"        | 64.7"         | 8-10"            | 10"                | 11.0"         | R20, R35B             |
| 43193       | 20.0 x 9.5-13 CL    | EP, FP, GT3, GTL   | 9.4"        | 20.0"        | 63.0"         | 7"               | 7"                 | 10.5"         | MS                    |
| 43195       | 20.0 x 9.0-13       | Sidecar            | 10.0"       | 19.8"        | 62.4"         | 9-11.0"          | 10"                | 11.6"         | R20                   |
| 43272       | 22.0 x 8.0-13       | SCCA-FE            | 8.0"        | 22.0"        | 69.0"         | 7-9"             | 8"                 | 9.6"          | FE                    |
| 43285       | 22.0 x 8.0-13       | FB, FC, FM, S2     | 8.0"        | 22.0"        | 69.0"         | 7-9"             | 8"                 | 9.6"          | R20, R35B, R60A       |
| 43290       | 22.0 x 9.0-13       | FA, FB, FC, FM, S2 | 8.8"        | 22.1"        | 69.5"         | 8-10"            | 8"                 | 10.0"         | R20, R35B, R60A       |
| 43307       | 22.5 x 7.2-13       | CF                 | 7.25"       | 22.6"        | 71.0"         | 5.5"             | 5.5"               | 9.8"          | R60A                  |
| 43312       | 22.0 x 10.0-13      | SCCA-FE            | 9.8"        | 22.6"        | 71.0"         | 8-10"            | 10"                | 11.6"         | FE                    |
| 43313       | 22.5 x 10.0-13      | SR                 | 9.8"        | 22.6"        | 71.0"         | 8-10"            | 10"                | 11.6"         | R20, R35B             |
| 43316       | 23.0 x 12.0-13      | FA, SR             | 12.0"       | 23.6"        | 74.1"         | 12-15"           | 15"                | 15.9"         | R20 R35B              |
| 43337       | 21.0 x 5.0-15 C4000 | FV                 | 5.0"        | 21.2"        | 66.5"         | 4"               | 4"                 | 5.5"          | FVS                   |
| 43353       | 22.5 x 5.5-15 C4000 | FV                 | 5.5"        | 21.9"        | 69.0"         | 4"               | 4"                 | 6.5"          | FVS                   |

ALL TREAD PATTERNS SLICK



## CIRCUIT RACING SLICKS - RADIAL

| ITEM NUMBER | TIRE SIZE      | APPLICATION             | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND SOFT TO FIRM |
|-------------|----------------|-------------------------|-------------|--------------|---------------|------------------|--------------------|---------------|-----------------------|
| 43322       | 185/60R13      | FF                      | 6.4"        | 21.8"        | 68.7"         | 5.5"             | 5.5"               | 7.7"          | R60A                  |
| 43327       | 205/60R13      | FF                      | 8.0"        | 22.7"        | 71.4"         | 5.5"             | 5.5"               | 8.7"          | R60A                  |
| 43359       | 200/540R13     | F4 Front                | 7.9"        | 21.3"        | 67.0"         | 9"               | 8-9"               | 9.7"          | SS1, S                |
| 43360       | 200/540R13     | P1, P2 Front            | 7.9"        | 21.3"        | 67.0"         | 9"               | 8-9"               | 9.7"          | S2                    |
| 43362       | 210/550R13     | P1, P2, Pro Mazda       | 8.7"        | 21.8"        | 68.5"         | 8-10"            | 10"                | 10.5"         | S                     |
| 43363       | 240/580R13     | Hill Climb/F3 Front     | 9.4"        | 22.9"        | 72.0"         | 10"              | 9-10"              | 10.7"         | SS1                   |
| 43364       | 250/575R13     | Hill Climb/F4 Rear      | 10.0"       | 22.7"        | 71.3"         | 10"              | 9-10"              | 10.9"         | SS1, S                |
| 43366       | 275/570R13     | Hill Climb/Pro Maz Rear | 10.75"      | 22.5"        | 70.7"         | 12"              | 11-12"             | 12.56"        | SS1, S                |
| 43367       | 275/570R13     | P1, P2 Rear             | 10.75"      | 22.5"        | 70.7"         | 12"              | 11-12"             | 12.56"        | S2                    |
| 43368       | 300/590R13     | Hill Climb/F3&Proto R   | 12.0"       | 23.1"        | 72.8"         | 12.5"            | 12-13"             | 13.8"         | SS1                   |
| 43550       | 215/530R13     | PROD., GT               | 8.3"        | 20.8"        | 65.4"         | 6-7"             | 7"                 | 8.8"          | MS, M                 |
| 43566       | 240/580R15     | PROD GT                 | 9.0"        | 22.9"        | 72.0"         | 7"               | 7-10"              | 9.6"          | MS                    |
| 43560       | 215/580R15     | PROD., GT               | 8.6"        | 22.9"        | 71.8"         | 7-9"             | 7"                 | 9.7"          | MS                    |
| 43569       | 245/580R15     | PROD., GT               | 9.4"        | 22.9"        | 71.8"         | 7-10"            | 7"                 | 10.0"         | MS, M                 |
| 43570       | 240/580R15     | FA/Indy Lights          | 9.4"        | 22.9"        | 72.0"         | 10"              | 10"                | 10.7"         | SS1                   |
| 43578       | 330/620R15     | FA/Indy Lights          | 13.5"       | 24.5"        | 76.5"         | 14"              | 14"                | 14.8"         | SS1                   |
| 43589       | 330/700R15     | HSC / TA2               | 11.9"       | 27.7"        | 87.1"         | 10-10.5"         | 10"                | 13.0"         | MS                    |
| 43654       | 23.5 x 11.0R16 | GT2                     | 10.6"       | 23.6"        | 74.0"         | 10"              | 10"                | 11.0"         | S, MS                 |
| 43659       | 23.5 x 12.0R16 | GT2                     | 12.0"       | 23.5"        | 73.8"         | 10-12"           | 12"                | 13.0"         | S                     |


REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES. FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## CIRCUIT RACING SLICKS - RADIAL CONT.

| ITEM NUMBER | TIRE SIZE      | APPLICATION         | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND SOFT TO FIRM |
|-------------|----------------|---------------------|-------------|--------------|---------------|------------------|--------------------|---------------|-----------------------|
| 43673       | 25.5 x 12.5R16 | GT1                 | 12.4"       | 25.8"        | 81.0"         | 10-12"           | 12"                | 13.5"         | S, MS                 |
| 43674       | 25.5 x 14.0R16 | Auto Cross          | 13.6"       | 25.7"        | 80.9"         | 12"              | 12"                | 14.1"         | S                     |
| 43675       | 355/650R16     | GT1                 | 13.6"       | 25.7"        | 80.9"         | 12"              | 12"                | 14.1"         | S2                    |
| 43698       | 365/720R16     | GT1                 | 13.9"       | 28.2"        | 88.5"         | 13"              | 13"                | 15.1"         | S2                    |
| 43711       | 200/610R17     | Polo / Clio Cup     | 7.7"        | 23.9"        | 75.0"         | 7.5"             | 7-10"              | 8.2"          | S, MH                 |
| 43724       | 240/610R17     | GT Cars / Club      | 9.0"        | 23.9"        | 75.1"         | 9"               | 9"                 | 9.75"         | MH                    |
| 43726       | 235/620R17     | NASA Prototype      | 8.8"        | 24.3"        | 76.5"         | 9"               | 9"                 | 9.6"          | NP01                  |
| 43731       | 240/610R17     | Hill Climb          | 9.1"        | 23.9"        | 75.1"         | 8.5-9.5"         | 9.5"               | 10.1"         | S, MS                 |
| 43740       | 265/630R17     | GT Cars / Club      | 10.1"       | 24.8"        | 77.9"         | 9-10"            | 10"                | 10.7"         | MH                    |
| 43838       | 265/650R18     | TCR/GT Cars/Club    | 10.1"       | 25.5"        | 80.0"         | 9-10"            | 10"                | 10.9"         | M, MH                 |
| 43850       | 285/650R18     | GT Cars / Club      | 11.0"       | 25.5"        | 80.5"         | 10-12"           | 11"                | 11.9"         | M, MH                 |
| 43869       | 310/650R18     | GT Cars/Club        | 11.6"       | 25.8"        | 81.1"         | 11-13"           | 12"                | 12.8"         | M, MH                 |
| 43874       | 310/680R18     | GT Cars / Club      | 11.6"       | 26.8"        | 84.3"         | 11-13"           | 12"                | 13.1"         | M, MH                 |
| 43892       | 325/710R18     | GT Cars / Club Rear | 12.0"       | 27.7"        | 87.0"         | 11-13"           | 13"                | 13.7"         | M, MH                 |
| 43894       | 355/650R18     | GT1                 | 13.5"       | 25.8"        | 81.0"         | 12-13"           | 13"                | 14.1"         | S2                    |
| 43898       | 365/720R18     | GT1                 | 14.5"       | 28.2"        | 88.6"         | 13-14"           | 14"                | 16.0"         | S2                    |

ALL TREAD PATTERNS ARE SLICKS

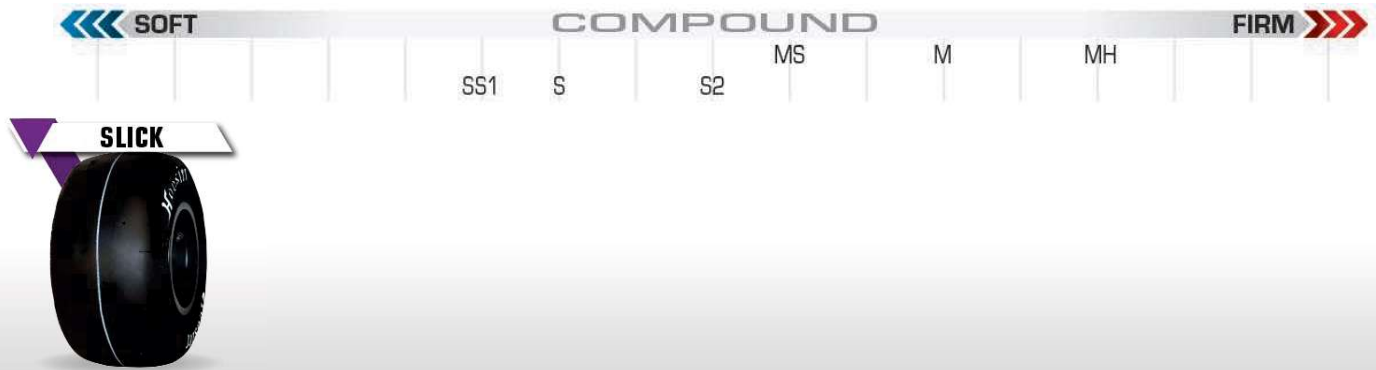

## CIRCUIT RACING WETS - BIAS

| ITEM NUMBER | TIRE SIZE        | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | APPLICATION                 |
|-------------|------------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|-----------------------------|
| 44115       | 18.0 x 6.0-10 W3 | FSAE Wet      | 6.2"        | 17.8"        | 56.0"         | 6-8"             | 6"                 | 7.8"          | F500, FSAE                  |
| 44125       | 19.5 x 6.5-10 W3 | Circuit Wet   | 6.2"        | 19.7"        | 62.0"         | 6-8"             | 8"                 | 8.2"          | F500                        |
| 44150       | 20.0 x 7.5-13 W3 | Circuit Wet   | 7.4"        | 20.6"        | 64.6"         | 7-8"             | 7"                 | 8.3"          | FA, P1, P2                  |
| 44185       | 21.0 x 6.5-13 W3 | Circuit Wet   | 6.7"        | 21.2"        | 66.5"         | 6-8"             | 6"                 | 7.2"          | FF, FM, FC, S2000, F1000    |
| 44196       | 22.0 x 8.0-13 W3 | Circuit Wet   | 7.8"        | 22.0"        | 69.0"         | 8.0"             | 8"                 | 8.9"          | SCCA-FE, FC, F1000          |
| 44217       | 22.0 x 9.0-13 W3 | Circuit Wet   | 9.6"        | 22.6"        | 71.0"         | 8.5-10"          | 9"                 | 10.6"         | SCCA-FE, FC, FA, FM, P1, P2 |
| 44266       | 22.5 x 5.0-15 W3 | Circuit Wet   | 5.0"        | 22.0"        | 69.2"         | 4.0"             | 4"                 | 6.5"          | FV                          |
| 44307       | 27.0 x 10.0-15   | Vintage Wet   | 10.0"       | 27.0"        | 84.0"         | 10-11"           | 10"                | 12.5"         | HSC/GTA                     |



REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
 FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## CIRCUIT RACING WETS - RADIALS

| ITEM NUMBER | TIRE SIZE          | TREAD PATTERN      | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | APPLICATION         |
|-------------|--------------------|--------------------|-------------|--------------|---------------|------------------|--------------------|---------------|---------------------|
| 44330       | 200/540R13 W3      | Circuit Radial Wet | 7.4"        | 21.3"        | 67.0"         | 8-9.0"           | 9.0"               | 9.4"          | F4, P1, P2          |
| 44333       | 250/575R13 W3      | Circuit Radial Wet | 10.0"       | 22.7"        | 71.3"         | 10-11"           | 10.0"              | 10.9"         | F4, P1, P2          |
| 44421       | 185/60R13 W3       | DOT Radial Wet     | 6.5"        | 21.7"        | 68.0"         | 5.5"             | 5.5"               | 7.5"          | FF                  |
| 44426       | 205/60R13 W3       | DOT Radial Wet     | 7.4"        | 23.2"        | 72.5"         | 5.5"             | 5.5"               | 8.4"          | FF                  |
| 44511       | 23.0 x 9.0R-15 W3  | Circuit Radial Wet | 9.4"        | 23.0"        | 72.3"         | 10"              | 10"                | 10.7"         | FA                  |
| 44516       | 24.5 x 13.0R-15 W3 | Circuit Radial Wet | 13.0"       | 24.4"        | 76.6"         | 14"              | 14"                | 15.1"         | FA                  |
| 44593       | 330/700R15 WET     | SC Radial Wet      | 12.5"       | 27.6"        | 86.9"         | 10-10.5"         | 10"                | 13.0"         | NASCAR EURO/TA2/HSC |
| 44670       | 25.5 x 12.0R-16 W2 | Circuit Radial Wet | 12.2"       | 25.7"        | 80.9"         | 12"              | 12"                | 13.2"         | GT1, GT2            |
| 44690       | 28.0 x 12.5R-16 W2 | Circuit Radial Wet | 13.6"       | 27.3"        | 85.7"         | 12"              | 12"                | 14.2"         | GT1                 |

CIRCUIT RADIAL WET



DOT RADIAL WET



## VINTAGE SPORTSCAR

| ITEM NUMBER | TIRE SIZE      | TREAD PATTERN  | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | MODEL                   |
|-------------|----------------|----------------|-------------|--------------|---------------|------------------|--------------------|---------------|-------------------------|
| 43589       | 330/700R15     | Slick (radial) | 11.9"       | 27.7"        | 87.1"         | 10-10.5"         | 10"                | 13"           | Historic Stock Car - MS |
| 44391       | 19.0 x 5.0-10  | T.D.R.         | 5.2"        | 18.8"        | 59.0"         | 5-6"             | 5.5"               | 7.8"          | HOOSIER T.D. R          |
| 44355       | 20.5 x 6.0-13  | T.D.R.         | 6.2"        | 20.6"        | 64.7"         | 5-7"             | 5.0"               | 7.0"          | HOOSIER T.D. R          |
| 44365       | 22.5 x 6.0-13  | T.D.R.         | 6.2"        | 22.4"        | 70.3"         | 5-7"             | 5.0"               | 7.5"          | HOOSIER T.D. R          |
| 44375       | 22.5 x 7.5-13  | T.D.R.         | 7.8"        | 22.2"        | 69.6"         | 6.5-8.5"         | 7.0"               | 9"            | HOOSIER T.D. R          |
| 44415       | 23.0 x 6.5-14  | T.D.R.         | 7.2"        | 23.0"        | 72.3"         | 5.5-8"           | 5.5"               | 8.3"          | HOOSIER T.D. R          |
| 44416       | 23.0 x 7.5-14  | T.D.R.         | 7.8"        | 23.0"        | 72.5"         | 6-9"             | 6.0"               | 8.8"          | HOOSIER T.D. R          |
| 44561       | 23.0 x 6.5-15  | T.D.R.         | 6.7"        | 23.0"        | 72.5"         | 5.5-7"           | 6.0"               | 7.6"          | HOOSIER T.D. R          |
| 44562       | 23.0 x 7.5-15  | T.D.R.         | 7.6"        | 23.0"        | 72.5"         | 6.5-8.5"         | 7.5"               | 8.5"          | HOOSIER T.D. R          |
| 44563       | 24.0 x 7.0-15  | T.D.R.         | 7.0"        | 24.0"        | 75.5"         | 6-8.5"           | 6.0"               | 8.5"          | HOOSIER T.D. R          |
| 44564       | 24.0 x 8.5-15  | T.D.R.         | 8.5"        | 24.0"        | 75.5"         | 7.0-9.5"         | 8.0"               | 10.0"         | HOOSIER T.D. R          |
| 44566       | 25.5 x 8.0-15  | T.D.R.         | 8.0"        | 25.2"        | 79.2"         | 6-9"             | 6.0"               | 9.2"          | HOOSIER T.D. R          |
| 44287       | 25.5 x 8.5-15  | T.D.R.         | 8.5"        | 25.2"        | 79.2"         | 7-10"            | 8.0"               | 10.3"         | HOOSIER T.D. R          |
| 44297       | 25.5 x 10.0-15 | T.D.R.         | 10.0"       | 25.8"        | 81.0"         | 8-11"            | 8.0"               | 11.2"         | HOOSIER T.D. R          |
| 44308       | 26.5 x 9.5-15  | T.D.R.         | 9.5"        | 26.6"        | 83.5"         | 8-10"            | 8.0"               | 11.0"         | HOOSIER T.D. R          |
| 44309       | 26.5 x 11.0-15 | T.D.R.         | 10.4"       | 27.0"        | 84.9"         | 9-12"            | 12.0"              | 13.6"         | HOOSIER T.D. R          |
| 44317       | 27.5 x 11.0-15 | T.D.R.         | 11.0"       | 27.7"        | 87.0"         | 10-13"           | 10.0"              | 13.2"         | HOOSIER T.D. R          |
| 44337       | 24.0 x 8.5-16  | T.D.R.         | 8.2"        | 24.1"        | 75.4"         | 8-10"            | 8.0"               | 10.5"         | HOOSIER T.D. R          |
| 44347       | 25.5 x 10.0-16 | T.D.R.         | 10.0"       | 25.6"        | 80.5"         | 9-11"            | 9.0"               | 11.3"         | HOOSIER T.D. R          |
| 44380       | 22.0 x 7.0-13  | Vintage        | 6.8"        | 20.9"        | 68.8"         | 5.5-7.5"         | 5.5"               | 7.8"          | WET                     |
| 44400       | 5.00-15        | Vintage        | 5.2"        | 24.7"        | 77.6"         | 4-6"             | 4.0"               | 7.0"          | VINTAGE T.D.            |
| 44410       | 5.50-15        | Vintage        | 6.5"        | 24.7"        | 77.6"         | 4.5-7"           | 4.5"               | 7.7"          | VINTAGE T.D.            |

SLICK



TRD



VINTAGE



## VINTAGE FORMULA

| ITEM NUMBER | TIRE SIZE      | TREAD PATTERN  | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | MODEL                    |
|-------------|----------------|----------------|-------------|--------------|---------------|------------------|--------------------|---------------|--------------------------|
| 43195       | 20.0 x 10.0-13 | Slick          | 10.0"       | 19.8"        | 62.4"         | 9-11"            | 10.0"              | 11.6"         | F5000 R20                |
| 43385       | 23.5 x 10.5-15 | Slick          | 10.8"       | 23.4"        | 73.6"         | 10-12"           | 11.5"              | 13.0"         | F5000/CanAm R20          |
| 43320       | 26.0 x 15.0-13 | Slick          | 15.0"       | 26.0"        | 81.6"         | 15-17"           | 15.0"              | 17.1"         | F5000/CanAm R20          |
| 43391       | 26.0 x 15.0-15 | Slick          | 15.0"       | 26.0"        | 81.6"         | 15-17"           | 15.0"              | 17.1"         | F5000/CanAm R20          |
| 43570       | 240/580R15     | Slick (radial) | 9.4"        | 22.9"        | 72"           | 10"              | 10"                | 10.7"         | Indy Lights S            |
| 43578       | 330/620R15     | Slick (radial) | 13.5"       | 24.5"        | 76.5"         | 14"              | 14"                | 14.8"         | Indy Lights S            |
| 43575       | 275/650R15     | Slick (radial) | 10.0"       | 25.4"        | 79.8"         | 10"              | 10"                | 11.3"         | Indy Car MS              |
| 43596       | 350/700R15     | Slick (radial) | 13.4"       | 27.4"        | 86.2"         | 15"              | 15"                | 16"           | Indy Car MS              |
| 44165       | 135/545-13     | Vintage        | 5.4"        | 21.3"        | 67.0"         | 5.5"             | 5.0"               | 6.6"          | Formula Ford VFF         |
| 44170       | 165/580-13     | Vintage        | 6.8"        | 22.7"        | 71.2"         | 5.5"             | 6.0"               | 8.5"          | Formula Ford VFF         |
| 44205       | 21.0 x 9.0-13  | Vintage        | 9.125"      | 20.9"        | 65.6"         | 10.0"            | 10.0"              | 10.5"         | Formula B R35B           |
| 44225       | 23.0 x 12.0-13 | Vintage        | 13.0"       | 23.3"        | 73.25"        | 13.0"            | 13.0"              | 14.375"       | Formula B R35B           |
| 44405       | 120/590-15     | Vintage        | 4.8"        | 22.6"        | 70.9"         | 4.5"             | 4.5"               | 6.1"          | Formula Vee VINTAGE T.D. |
| 44408       | 135/620-15     | Vintage        | 5.6"        | 24.1"        | 75.6"         | 4.5"             | 4.5"               | 6.9"          | Formula Vee VINTAGE T.D. |



## VINTAGE T-SECTION

| ITEM NUMBER | TIRE SIZE | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | MODEL         |
|-------------|-----------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|---------------|
| 44450       | 5.00T10   | Vintage       | 4.8"        | 19.6"        | 61.5"         | 5.0-6.0"         | 5.0"               | 6.8"          | Renner Racing |
| 44452       | 4.50T12   | Vintage       | 4.7"        | 21.1"        | 66.3"         | 5.0-6.0"         | 5.0"               | 6.9"          | Renner Racing |
| 44454       | 4.50T13   | Vintage       | 4.6"        | 22.2"        | 69.7"         | 5.0-6.0"         | 5.0"               | 6.6"          | Renner Racing |
| 44456       | 5.50T13   | Vintage       | 5.2"        | 23.8"        | 74.7"         | 5.0-6.0"         | 5.5"               | 8.3"          | Renner Racing |
| 44458       | 5.50T14   | Vintage       | 5.1"        | 24.7"        | 77.6"         | 5.0-6.0"         | 5.5"               | 7.8"          | Renner Racing |
| 44460       | 4.50T15   | Vintage       | 4.1"        | 24.0"        | 75.4"         | 5.0-6.0"         | 5.0"               | 6.3"          | Renner Racing |
| 44462       | 5.00T15   | Vintage       | 4.8"        | 24.7"        | 77.6"         | 5.0-6.0"         | 6.0"               | 7.7"          | Renner Racing |
| 44464       | 5.50T15   | Vintage       | 5.1"        | 25.5"        | 80.1"         | 6.0-7.0"         | 6.5"               | 8.2"          | Renner Racing |
| 44466       | 6.00T15   | Vintage       | 5.5"        | 26.7"        | 83.8"         | 6.5-7.5"         | 7.0"               | 9.2"          | Renner Racing |
| 44468       | 6.50T15   | Vintage       | 5.8"        | 27.3"        | 85.7"         | 7.0-8.0"         | 7.5"               | 9.9"          | Renner Racing |
| 44470       | 7.00T15   | Vintage       | 6.8"        | 27.6"        | 86.7"         | 8.0-9.0"         | 8.5"               | 11"           | Renner Racing |
| 44472       | 6.00T16   | Vintage       | 5.0"        | 27.6"        | 86.7"         | 5.5-6.5"         | 6.0"               | 8.3"          | Renner Racing |





## VINTAGE RADIAL

| ITEM NUMBER | TIRE SIZE  | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH |
|-------------|------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|
| 46003       | P205/60R13 | Speedster     | 7.3"        | 22.7"        | 71.2"         | 5.5-7"           | 6.0"               | 8.4"          |
| 46011       | P185/65R15 | Speedster     | 6.4"        | 24.2"        | 76.0"         | 5-7"             | 5.0"               | 7.0"          |
| 46014       | P205/50R15 | Speedster     | 7.3"        | 22.7"        | 71.4"         | 5.5-8"           | 7.0"               | 8.3"          |
| 46016       | P205/60R15 | Speedster     | 7.3"        | 24.2"        | 76.0"         | 5.5-8"           | 6.5"               | 8.2"          |
| 46021       | P225/50R15 | Speedster     | 8.1"        | 24.2"        | 76.0"         | 6.5-9"           | 7.0"               | 9.125"        |

**WARNING:** DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for making and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.



## CIRCUIT RACING D.O.T. - RADIAL

| ITEM NUMBER | TIRE SIZE         | LOAD/SPEED RATING | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | A7 | R7 |
|-------------|-------------------|-------------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----|----|
| 46302       | P185/60ZR13       | 80W               | A7 / R7       | 6.9"        | 21.9"        | 68.7"         | 5.0-7.0"         | 5.5"               | 7.8"          |    | X  |
| 46304       | P205/60ZR13       | 86W               | A7 / R7       | 8.0"        | 22.8"        | 71.5"         | 6.0-7.5"         | 7.0"               | 9.4"          |    | X  |
| 46309       | P225/45ZR13       | 77W               | A7 / R7       | 8.5"        | 20.9"        | 65.8"         | 7.0-8.5"         | 7.5"               | 9.3"          | X  | X  |
| 46322       | P255/40ZR13       | 82W               | A7 / R7       | 9.5"        | 20.9"        | 65.6"         | 8.5-10.0"        | 9.0"               | 10.5"         | X  |    |
| 46406       | P205/55ZR14       | 85W               | A7 / R7       | 8.1"        | 22.8"        | 71.6"         | 5.5-7.5"         | 7.0"               | 9.1"          |    | X  |
| 46502       | P205/50ZR15       | 84W               | A7 / R7       | 8.0"        | 22.8"        | 71.8"         | 5.5-7.5"         | 6.5"               | 8.5"          | X  | X  |
| 46503       | P205/50ZR15 SM7.5 |                   | A7 / R7       | 8.0"        | 22.8"        | 71.8"         | 5.5-7.5"         | 6.5"               | 8.5"          |    | X  |
| 46511       | P225/45ZR15       | 81W               | A7 / R7       | 8.6"        | 22.8"        | 71.8"         | 7.0-8.5"         | 7.5"               | 9.3"          | X  | X  |
| 46516       | P225/50ZR15       | 90W               | A7 / R7       | 8.8"        | 23.8"        | 74.8"         | 6.0-8.0"         | 7.0"               | 9.7"          |    | X  |
| 46522       | P245/40ZR15       | 83W               | A7 / R7       | 9.0"        | 23.0"        | 72.0"         | 7.0-9.0"         | 8.5"               | 10.0"         | X  | X  |
| 46526       | P245/50ZR15       | 95W               | A7 / R7       | 9.4"        | 24.4"        | 76.2"         | 7.0-9.0"         | 7.5"               | 10.3"         |    | X  |
| 46536       | P275/35ZR15       | 82W               | A7 / R7       | 10.1"       | 23.0"        | 72.2"         | 9.0-11.0"        | 9.5"               | 10.8"         | X  | X  |
| 46540       | P275/50ZR15       | 101W              | A7 / R7       | 10.0"       | 25.5"        | 80.0"         | 7.5-9.5"         | 8.0"               | 10.8"         |    | X  |
| 46560       | P295/35ZR15       | 101W              | A7 / R7       | 10.5"       | 23.0"        | 72.3"         | 9.0-11.0"        | 10.0"              | 11.6"         | X  | X  |
| 46601       | P205/45ZR16       | 77W               | A7 / R7       | 8.0"        | 23.0"        | 72.1"         | 7.0-8.5"         | 7.0"               | 8.5"          | X  | X  |
| 46611       | P225/50ZR16       | 91W               | A7 / R7       | 8.8"        | 24.7"        | 77.6"         | 7.0-9.0"         | 7.0"               | 9.4"          |    | X  |
| 46616       | P245/45ZR16       | 88W               | A7 / R7       | 9.5"        | 24.4"        | 76.5"         | 7.5-9.0"         | 8.0"               | 10.3"         |    | X  |
| 46630       | P275/45ZR16       | 94W               | A7 / R7       | 10.3"       | 25.6"        | 80.5"         | 9.0-11.0"        | 9.0"               | 11.2"         |    | X  |
| 46706       | P225/40ZR17       | 81W               | A7 / R7       | 9.0"        | 23.8"        | 74.8"         | 7.0-9.0"         | 8.0"               | 9.6"          | X  | X  |
| 46711       | P225/45ZR17       | 84W               | A7 / R7       | 9.0"        | 24.7"        | 77.8"         | 7.0-9.0"         | 7.5"               | 9.7"          | X  | X  |
| 46716       | P245/40ZR17       | 86W               | A7 / R7       | 9.7"        | 24.3"        | 76.0"         | 8.0-9.5"         | 8.5"               | 10.3"         | X  | X  |
| 46721       | P245/45ZR17       | 89W               | A7 / R7       | 9.3"        | 25.5"        | 80.0"         | 7.5-9.0"         | 8.0"               | 10.0"         |    | X  |
| 46729       | P275/35ZR17       | 85W               | A7 / R7       | 10.3"       | 24.7"        | 77.7"         | 9.0-11.0"        | 9.5"               | 11.0"         | X  | X  |
| 46730       | P275/40ZR17       | 93W               | A7 / R7       | 10.3"       | 25.5"        | 80.1"         | 9.0-11.0"        | 9.5"               | 11.0"         | X  | X  |
| 46733       | P295/35ZR17       | 89W               | A7 / R7       | 10.8"       | 25.3"        | 79.5"         | 10.0-12.0"       | 10.0"              | 11.6"         | X  | X  |

REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

## CIRCUIT RACING D.O.T. - RADIAL CONT.

| ITEM NUMBER | TIRE SIZE   | LOAD/SPEED RATING | TREAD PATTERN | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | A7 | R7 |
|-------------|-------------|-------------------|---------------|-------------|--------------|---------------|------------------|--------------------|---------------|----|----|
| 46735       | P315/35ZR17 | 93W               | A7 / R7       | 11.8"       | 25.6"        | 80.4"         | 11.0-12.0"       | 11.0"              | 12.6"         | X  | X  |
| 46740       | P335/35ZR17 | 97W               | A7 / R7       | 12.9"       | 25.6"        | 80.5"         | 11.0-13.0"       | 12.0"              | 13.6"         | X  |    |
| 46811       | P225/40ZR18 | 83W               | A7 / R7       | 8.8"        | 24.7"        | 77.6"         | 7.0-9.0"         | 8.0"               | 9.6"          |    | X  |
| 46826       | P245/40ZR18 | 88W               | A7 / R7       | 9.0"        | 25.4"        | 79.8"         | 8.0-9.5"         | 8.5"               | 10.3"         | X  | X  |
| 46832       | P255/35ZR18 | 82W               | A7 / R7       | 10.3"       | 24.8"        | 77.8"         | 9.0-11.0"        | 9.0"               | 10.8"         | X  | X  |
| 46840       | P285/30ZR18 | 86W               | A7 / R7       | 10.9"       | 24.9"        | 78.1"         | 10.0-12.0"       | 10.0"              | 11.5"         | X  | X  |
| 46843       | P295/30ZR18 | 88W               | A7 / R7       | 10.8"       | 25.3"        | 79.5"         | 10.0-12.0"       | 10.0"              | 11.6"         | X  | X  |
| 46821       | P245/35ZR18 | 80W               | A7 / R7       | 9.4"        | 24.4"        | 76.7"         | 8.0-9.5"         | 8.5"               | 9.9"          | X  | X  |
| 46836       | P275/35ZR18 | 87W               | A7 / R7       | 10.3"       | 25.5"        | 80.2"         | 9.0-11.0"        | 9.5"               | 10.7"         | X  | X  |
| 46844       | P295/40ZR18 | 98W               | A7 / R7       | 10.4"       | 27.2"        | 85.6"         | 10.0-12.0"       | 10.5"              | 11.9"         |    | X  |
| 46846       | P315/30ZR18 | 91W               | A7 / R7       | 11.8"       | 25.6"        | 80.5"         | 11.0-12.0"       | 11.0"              | 12.5"         | X  | X  |
| 46847       | P315/40ZR18 | 102W              | A7 / R7       | 11.3"       | 27.3"        | 85.7"         | 10.5-12.5"       | 11.0"              | 13.2"         |    | X  |
| 46850       | P335/30ZR18 | 95W               | A7 / R7       | 12.8"       | 25.6"        | 80.5"         | 12.0-13.0"       | 12.0"              | 13.5"         | X  | X  |
| 46855       | P345/35ZR18 | 100W              | A7 / R7       | 13.2"       | 26.8"        | 84.2"         | 11.0-13.0"       | 12.0"              | 13.9"         | X  | X  |
| 46916       | P235/35ZR19 | 79W               | A7 / R7       | 9.25"       | 25.6"        | 80.5"         | 8.0-9.5"         | 9.0"               | 10.2"         | X  | X  |
| 46925       | P265/35ZR19 | 86W               | A7 / R7       | 9.6"        | 26.2"        | 82.3"         | 9.0-10.0"        | 9.0"               | 10.4"         | X  | X  |
| 46935       | P295/30ZR19 | 89W               | A7 / R7       | 10.4"       | 26.1"        | 82.1"         | 10.0-12.0"       | 10.0"              | 11.5"         | X  | X  |
| 46936       | P295/35ZR19 | 92W               | A7 / R7       | 10.0"       | 27.3"        | 86.0"         | 10.0-12.0"       | 10.0"              | 11.5"         |    | X  |
| 46937       | P315/30ZR19 | 93W               | A7 / R7       | 12.0"       | 26.1"        | 82.2"         | 11.0-12.0"       | 11.0"              | 12.5"         | X  | X  |
| 46938       | P315/35ZR19 | 96W               | A7 / R7       | 11.3"       | 27.3"        | 85.7"         | 11.0-12.0"       | 12.0"              | 13.2"         |    | X  |
| 46940       | P315/40ZR19 | 103W              | A7 / R7       | 11.3"       | 28.9"        | 90.7"         | 11.0-12.0"       | 11.0"              | 12.9"         |    | X  |
| 46945       | P325/30ZR19 | 94W               | A7 / R7       | 12.2"       | 26.8"        | 84.1"         | 12.0-13.0"       | 13.0"              | 13.6"         | X  | X  |
| 46950       | P345/30ZR19 | 98W               | A7 / R7       | 13.0"       | 26.8"        | 84.3"         | 12.0-13.0"       | 13.0"              | 14.1"         | X  | X  |
| 46955       | P245/35ZR20 | 95W               | A7 / R7       | 9.1"        | 26.8"        | 84.3"         | 8.0-10.0"        | 8.5"               | 9.8"          |    | X  |
| 46965       | P265/30ZR20 | 95W               | A7 / R7       | 9.8"        | 26.7"        | 83.9"         | 9.0-10.0"        | 9.5"               | 10.9"         |    | X  |
| 46975       | P285/30ZR20 | 99W               | A7 / R7       | 9.9"        | 26.7"        | 84.0"         | 9.0-10.0"        | 10.0"              | 11.5"         |    | X  |
| 46980       | P295/30ZR20 | 101W              | A7 / R7       | 10.6"       | 27.2"        | 85.5"         | 10.0-12.0"       | 10.5"              | 11.7"         |    | X  |
| 46986       | P305/30ZR20 | 103W              | A7 / R7       | 11.8"       | 27.1"        | 85.3"         | 11.0-12.0"       | 12.0"              | 13.2"         | X  | X  |
| 46996       | P335/25ZR20 | 103W              | A7 / R7       | 12.8"       | 27.1"        | 85.5"         | 12.0-13.0"       | 12.0"              | 13.5"         | X  | X  |

**WARNING:** DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for racing and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.



## CIRCUIT RACING D.O.T. - RADIAL WET

|       |                |     |                   |       |       |        |            |       |       |
|-------|----------------|-----|-------------------|-------|-------|--------|------------|-------|-------|
| 46100 | P185/60R13 W2  | 86H | D.O.T. Radial Wet | 6.8"  | 21.5" | 67.5"  | 5.0-7.0"   | 5.5"  | 7.7"  |
| 46101 | P185/65R13 W2  | 86H | D.O.T. Radial Wet | 6.8"  | 22.2" | 69.8"  | 5.0-7.0"   | 5.5"  | 7.9"  |
| 46105 | P205/60R13 W2  | 86H | D.O.T. Radial Wet | 7.2"  | 23.1" | 72.5"  | 6.0-7.5"   | 7.0"  | 9.3"  |
| 46115 | P205/55R14 W2  | 85H | D.O.T. Radial Wet | 7.1"  | 23.5" | 73.8"  | 5.5-7.5"   | 6.5"  | 8.7"  |
| 46126 | P205/50R15 W2  | 84H | D.O.T. Radial Wet | 7.1"  | 23.5" | 73.8"  | 5.5-7.5"   | 6.5"  | 8.2"  |
| 46126 | P205/50R15 SMW | 84H | D.O.T. Radial Wet | 7.1"  | 23.5" | 73.8"  | 5.5-7.5"   | 6.5"  | 8.2"  |
| 46127 | P225/45R15 W2  | 81H | D.O.T. Radial Wet | 8.9"  | 22.9" | 72.0"  | 7.0-8.5"   | 8.0"  | 9.4"  |
| 46140 | P225/50R16 W2  | 91H | D.O.T. Radial Wet | 8.8"  | 24.8" | 77.9"  | 7.0-9.0"   | 7.0"  | 9.6"  |
| 46170 | P225/45R17 W2  | 84H | D.O.T. Radial Wet | 8.8"  | 24.8" | 77.9"  | 7.0-9.0"   | 7.5"  | 9.5"  |
| 46175 | P245/40R17 W2  | 86H | D.O.T. Radial Wet | 9.0"  | 24.8" | 77.9"  | 8.0-9.5"   | 8.0"  | 10.0" |
| 46185 | P275/40R17 W2  | 93H | D.O.T. Radial Wet | 10.0" | 25.2" | 79.2"  | 9.0-11.0"  | 9.5"  | 11.3" |
| 46205 | P245/35R18 W2  | 80H | D.O.T. Radial Wet | 9.0"  | 24.8" | 77.9"  | 8.0-9.5"   | 8.0"  | 10.0" |
| 46207 | P245/40R18 W2  | 88H | D.O.T. Radial Wet | 8.75" | 25.5" | 80.25" | 8.0-9.5"   | 9.0"  | 9.75" |
| 46215 | P275/35R18 W2  | 87H | D.O.T. Radial Wet | 10.0" | 25.2" | 79.2"  | 9.0-11.0"  | 9.5"  | 11.3" |
| 46220 | P305/30R18 W2  | 89H | D.O.T. Radial Wet | 11.8" | 25.6" | 80.4"  | 11.0-12.0" | 11.0" | 12.7" |
| 46230 | P325/35R18 W2  | 96H | D.O.T. Radial Wet | 12.0" | 27.0" | 84.6"  | 11.0-13.0" | 12.0" | 13.3" |

**WARNING:** DOT labeled Hoosier Racing Tires meet Department of Transportation requirements for racing and performance only and are **NOT INTENDED FOR HIGHWAY USE**. It is unsafe to operate any Hoosier Racing Tire including DOT tires on public roads. The prohibited use of Hoosier Racing tires on public roadways may result in loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure, resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH**.

**NOTE:** H Speed Rating = 130 mph/210 km/h.

### DOT RADIAL WET



## FORMULA STUDENT (FSAE)

| ITEM NUMBER | TIRE SIZE     | APPLICATION | APPROX. WEIGHT | TREAD WIDTH. | APPROX. DIA. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND SOFT TO FIRM |
|-------------|---------------|-------------|----------------|--------------|--------------|------------------|--------------------|---------------|-----------------------|
| 41100       | 6.0/18.0-10   | FSAE-Slick  | 8LBS           | 6.0"         | 18.1"        | 6-7"             | 7.0"               | 8.5"          | LCO                   |
| 43070       | 16.0 x 6.0-10 | FSAE-Slick  | 7LBS           | 6.0"         | 16.3"        | 6-7"             | 6.0"               | 6.9"          | LCO, R20              |
| 43075       | 16.0 x 7.5-10 | FSAE-Slick  | 8LBS           | 7.3"         | 16.2"        | 6-8"             | 8.0"               | 8.4"          | LCO, R20              |
| 43100       | 18.0 x 6.0-10 | FSAE-Slick  | 9LBS           | 6.2"         | 18.1"        | 6.5-7"           | 6.0"               | 8.1"          | R20                   |
| 43105       | 18.0 x 7.5-10 | FSAE-Slick  | 10LBS          | 7.5"         | 18.3"        | 7-8"             | 8.0"               | 9.5"          | R20                   |
| 43164       | 20.5 x 7.0-13 | FSAE-Slick  | 11LBS          | 7.0"         | 21.0"        | 5.5-8"           | 6.0"               | 8.0"          | R20                   |
| 43167       | 20.0 x 7.5-13 | FSAE-Slick  | 12LBS          | 8.0"         | 20.6"        | 7-9"             | 8.0"               | 9.4"          | R20                   |
| 44070       | 16.0 x 7.0-10 | Circuit Wet | 7.5LBS         | 7.0"         | 16.2"        | 6-7"             | 6.0"               | 7.6"          | W3                    |
| 44115       | 18.0 x 6.0-10 | FSAE-Wet    | 9LBS           | 6.2"         | 17.8"        | 6-8"             | 6.0"               | 7.8"          | W3                    |
| 44125       | 19.5 x 6.5-10 | Circuit Wet | 10LBS          | 6.2"         | 19.5"        | 6-8"             | 6.0"               | 8.2"          | Wet                   |
| 44150       | 20.0 x 7.5-13 | Circuit Wet | 12LBS          | 7.4"         | 20.6"        | 6-8"             | 7.0"               | 8.3"          | W3                    |
| 44185       | 21.0 x 6.5-13 | Circuit Wet | 11LBS          | 6.7"         | 20.9"        | 6-8"             | 6.0"               | 7.2"          | W3                    |

### FSAE SLICK



### FSAE WET



### CIRCUIT WET



REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

# RALLY

| ITEM NUMBER | TIRE SIZE | TREAD PATTERN        | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND  |
|-------------|-----------|----------------------|-------------|--------------|---------------|------------------|--------------------|---------------|-----------|
| 48002       | 165/80R13 | Gravel Rally - Right | 5.3"        | 23.5"        | 74.0"         | 6.0"             | 6.0"               | 7.3"          | MED, HARD |
| 48003       | 165/80R13 | Gravel Rally - Left  | 5.3"        | 23.5"        | 74.0"         | 6.0"             | 6.0"               | 7.3"          | MED, HARD |
| 48004       | 185/70R13 | Gravel Rally - Right | 5.8"        | 23.5"        | 74.0"         | 7.0"             | 7.0"               | 8.2"          | MED, HARD |
| 48005       | 185/70R13 | Gravel Rally - Left  | 5.8"        | 23.5"        | 74.0"         | 7.0"             | 7.0"               | 8.2"          | MED, HARD |
| 48006       | 185/65R15 | Gravel Rally - Right | 6.5"        | 24.8"        | 78.0"         | 6.0"             | 6.0"               | 7.4"          | MED, HARD |
| 48007       | 185/65R15 | Gravel Rally - Left  | 6.5"        | 24.8"        | 78.0"         | 6.0"             | 6.0"               | 7.4"          | MED, HARD |
| 48008       | 195/65R15 | Gravel Rally - Right | 6.7"        | 25.2"        | 79.0"         | 7.0"             | 6.0"               | 7.7"          | MED, HARD |
| 48009       | 195/65R15 | Gravel Rally - Left  | 6.7"        | 25.2"        | 79.0"         | 7.0"             | 6.0"               | 7.7"          | MED, HARD |
| 48010       | 205/65R15 | Gravel Rally - Right | 7.1"        | 25.3"        | 79.5"         | 7.0"             | 7.0"               | 8.75"         | MED, HARD |
| 48011       | 205/65R15 | Gravel Rally - Left  | 7.1"        | 25.3"        | 79.5"         | 7.0"             | 7.0"               | 8.75"         | MED, HARD |
| 44306       | 195/50R13 | Tarmac Wet           | 6.9"        | 20.8"        | 65.3"         | 7.0"             | 7.0"               | 7.8"          | W10       |
| 44316       | 225/45R13 | Tarmac Wet           | 8.6"        | 20.9"        | 65.8"         | 7.5"             | 7.5"               | 8.8"          | W10       |
| 44320*      | 195/50R13 | Symmetric Tarmac     | 6.9"        | 20.8"        | 65.5"         | 7.5"             | 7.0"               | 7.6"          | WET, DS   |
| 44325*      | 195/50R13 | Symmetric Tarmac     | 6.9"        | 20.8"        | 65.5"         | 7.5"             | 7.0"               | 7.6"          | DM, DH    |
| 44335*      | 225/45R13 | Symmetric Tarmac     | 7.8"        | 20.8"        | 65.5"         | 7.5"             | 7.5"               | 8.5"          | WET, DS   |
| 44340*      | 225/45R13 | Symmetric Tarmac     | 7.8"        | 20.8"        | 65.5"         | 7.5"             | 7.5"               | 8.5"          | DM, DH    |
| 44512       | 195/50R15 | Tarmac Wet           | 7.0"        | 22.8"        | 71.5"         | 6.5"             | 6.5"               | 7.6"          | W10       |
| 44522*      | 195/50R15 | Symmetric Tarmac     | 7.2"        | 22.8"        | 71.5"         | 6.0"             | 6.5"               | 7.8"          | WET, DS   |
| 44523*      | 195/50R15 | Symmetric Tarmac     | 7.2"        | 22.8"        | 71.5"         | 6.0"             | 6.5"               | 7.8"          | DM, DH    |
| 44524       | 225/45R15 | Tarmac Wet           | 8.3"        | 23.0"        | 72.2"         | 7.0"             | 7.0"               | 8.6"          | W10       |
| 44540*      | 225/45R15 | Symmetric Tarmac     | 7.5"        | 22.7"        | 71.5"         | 7.5"             | 7.0"               | 8.6"          | WET, DS   |
| 44545*      | 225/45R15 | Symmetric Tarmac     | 7.5"        | 22.7"        | 71.5"         | 7.5"             | 7.0"               | 8.6"          | DM, DH    |
| 44601*      | 195/50R16 | Asymmetric Tarmac    | 7.6"        | 23.7"        | 74.0"         | 6.0"             | 6.5"               | 7.8"          | WET, DS   |
| 44602*      | 195/50R16 | Asymmetric Tarmac    | 7.6"        | 23.7"        | 74.0"         | 6.0"             | 6.5"               | 7.8"          | DM, DH    |
| 44605       | 195/50R16 | Tarmac Wet           | 7.0"        | 23.6"        | 74.1"         | 6.0"             | 6.0"               | 7.6"          | W10       |
| 44701*      | 195/50R17 | Asymmetric Tarmac    | 7.6"        | 24.6"        | 77.1"         | 7.0"             | 7.0"               | 7.9"          | WET, DS   |
| 44702*      | 195/50R17 | Asymmetric Tarmac    | 7.6"        | 24.6"        | 77.1"         | 6.0"             | 7.0"               | 7.9"          | DM, DH    |
| 44705       | 195/50R17 | Tarmac Wet           | 7.0"        | 24.6"        | 77.4"         | 6.0"             | 6.0"               | 7.4"          | W10       |
| 44801*      | 225/40R18 | Asymmetric Tarmac    | 8.6"        | 25.3"        | 79.4"         | 8.0"             | 8.0"               | 9.0"          | WET, DS   |
| 44802*      | 225/40R18 | Asymmetric Tarmac    | 8.6"        | 25.3"        | 79.4"         | 8.0"             | 8.0"               | 9.0"          | DM, DH    |

\* = E-MARK



# OFF ROAD

## DIRT BIKE

| ITEM NUMBER | TIRE SIZE      | TREAD PATTERN    | TREAD WIDTH | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND SOFT TO FIRM | APPLICATION     |
|-------------|----------------|------------------|-------------|---------------|------------------|--------------------|---------------|-----------------------|-----------------|
| 07000       | 60/100-10      | Motocross Front  | 2.75"       | 48.0"         | 1.5"             | 1.5"               | 2.75"         | MX30                  | 50cc JR Front   |
| 07005       | 60/100-12      | Motocross Front  | 2.70"       | 53.75"        | 1.5"             | 1.5"               | 2.70"         | MX30                  | 50cc SR Front   |
| 07010       | 70/100-10      | Motocross Rear   | 3.12"       | 48.75"        | 1.5"             | 1.5"               | 3.12"         | IMX30                 | 50cc Rear       |
| 07015       | 60/100-14      | Motocross Front  | 2.63"       | 60.5"         | 1.4"             | 1.4"               | 2.375"        | MX30                  | 65cc Front      |
| 07025       | 70/100-17      | Motocross Front  | 3.20"       | 72.75"        | 1.4"             | 1.4"               | 2.70"         | MX30                  | 85cc Front      |
| 07030       | 90/100-14      | Motocross Rear   | 4.50"       | 68.5"         | 1.6"             | 1.6"               | 3.65"         | IMX30                 | 85cc Rear       |
| 07113       | 80/100-21 C100 | Motocross Front  | 3.86"       | 88.75"        | 1.6"             | 1.6"               | 3.86"         | MX25S, MX30S          | 125, 250, 450cc |
| 07114       | 80/100-21      | Motocross Front  | 3.70"       | 87.75"        | 1.6"             | 1.6"               | 3.70"         | MX25F, MX30F          | 125, 250, 450cc |
| 07180       | 110/100-18     | Motocross Rear   | 4.70"       | 84.50"        | 1.85-2.15"       | 2.15"              | 4.70"         | IMX25, IMX30          | 125, 250, 450cc |
| 07193       | 110/90-19 C100 | Motocross Rear   | 4.65"       | 88.75"        | 1.85-2.15"       | 2.15"              | 4.65"         | IMX20, IMX25, IMX30   | 125, 250, 450cc |
| 07203       | 120/80-19 C100 | Motocross Rear   | 5.0"        | 85.75"        | 1.85-2.15"       | 2.15"              | 5.0"          | IMX20, IMX25, IMX30   | 250, 450cc      |
| 07218       | 120/90-18      | Motocross Rear   | 5.10"       | 84.875"       | 2.15"            | 2.15"              | 5.10"         | IMX25, IMX30          | 250, 450cc      |
| 07219       | 120/90-18 C100 | Motocross Rear   | 5.10"       | 84.75"        | 2.15"            | 2.15"              | 5.10"         | IMX25, IMX30          | 250, 450cc      |
| 07280       | 110/100-18     | Soft Terrain     | 5.00"       | 85.125"       | 1.85-2.15"       | 2.15"              | 4.10"         | ST1                   | 125, 250, 450cc |
| 07300       | 110/90-19      | Soft Terrain     | 4.875"      | 86.0"         | 2.15"            | 2.15"              | 3.875"        | ST1                   | 125, 250, 450cc |
| 07501       | 130/80-19      | Flat Track Front | 5.00"       | 85.125"       | 2.25-3.00"       | 2.4"               | 4.75"         | FT30, FT40, FT50      | Flat Track      |
| 07551       | 140/80-19      | Flat Track Rear  | 5.65"       | 87.00"        | 2.75-3.50"       | 3.0"               | 5.20"         | FT30, FT40, FT50      | Flat Track      |

## ATV / 3 WHEELER

| ITEM NUMBER | TIRE SIZE    | PLY RATING | TREAD PATTERN      | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM | APPLICATION     |
|-------------|--------------|------------|--------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|-----------------|
| 11940       | 12.0x 8.0-6  | NA         | Treaded Crossblock | 8.0"        | 12.0"        | 37.5"         | 9-10"            | 10"                | 9.75"         | D10A, D20A                       | Youth ATV Rear  |
| 11960       | 12.0x 9.0-6  | NA         | Treaded Crossblock | 9.0"        | 12.0"        | 38.5"         | 9-10"            | 10"                | 10.25"        | D10A, D20A, D30A                 | Youth ATV Rear  |
| 16050       | 16.0x 8.5-8  | NA         | Small Crossblock   | 8.5"        | 16.0"        | 53.5"         | 8-9"             | 9"                 | 10.5"         | T30                              | 3 Wheeler       |
| 16105       | 21.0x 6.0-10 | NA         | Rib                | 7.0"        | 21.0"        | 66.0"         | 6-8"             | 7"                 | 8.25"         | T20                              | 3 Wheeler Front |
| 16110       | 18.0x11.0-10 | NA         | Wide Tri-Trac      | 10.0"       | 18.0"        | 57.0"         | 10"              | 10"                | 11.0"         | T10, T20                         | Flat Track & TT |
| 16115       | 18.0x10.0-10 | NA         | Tri-Trac           | 9.0"        | 18.0"        | 57.0"         | 9-10"            | 9"                 | 10.5"         | RD20, RD30                       | Flat Track & TT |
| 16130       | 18.5x 6.0-10 | NA         | Tri-Trac Front     | 6.0"        | 18.5"        | 59.0"         | 5"               | 5"                 | 7.5"          | T10                              | Flat Track & TT |
| 16250       | 18.0x 5.5-10 | NA         | ATV Front          | 5.5"        | 18.0"        | 57-58"        | 5"               | 5"                 | 6.6"          | RD20                             | Flat Track & TT |
| 16275       | 18.5x 8.0-10 | NA         | Large Crossblock   | 8.5"        | 18.5"        | 59.0"         | 8"               | 8"                 | 9.5"          | RD20                             | Flat Track & TT |
| 16300       | 18.0x10.0-10 | NA         | Large Crossblock   | 10.0"       | 18.0"        | 58.0"         | 9-10"            | 10"                | 11.0"         | RD20, RD30                       | Flat Track & TT |
| 16325       | 18.5x10.0-10 | NA         | Large Crossblock   | 10.0"       | 18.5"        | 59.0"         | 10"              | 10"                | 10.9"         | D10                              | Flat Track & TT |
| 16600       | 20.5x 6.0-10 | NA         | MX Front           | 5.0"        | 20.5"        | 63.25"        | 5"               | 5"                 | 6.5"          | MX 150                           | MX Front        |
| 16700       | 18.0x10.0-8  | NA         | MX Rear            | 8.5"        | 18.0"        | 56.5"         | 8"               | 8"                 | 9.625"        | MX150, MX200                     | MX Rear         |
| 16805       | 21.0x 7.0-10 | 6 PLY      | ATV Front          | 6.75"       | 20.5"        | 64.5"         | 5"               | 5"                 | 7.0"          | XC200                            | ATV Front       |
| 16900       | 20.0x11.0-9  | 6 PLY      | ATV Rear           | 9.75"       | 20.0"        | 62.5"         | 8"               | 8"                 | 10.75"        | XC200                            | ATV Rear        |
| 16910       | 20.0x11.0-9  | 6 PLY      | ATV Rear           | 9.75"       | 20.0"        | 62.5"         | 8"               | 8"                 | 10.75"        | XC175                            | ATV Rear        |
| 42400       | 15.0/ 6.0-8  | NA         | ATV Front          | 6.0"        | 15.0"        | 49.0"         | 6"               | 6"                 | 7.4"          | D12, RD20                        | Flat Track & TT |
| 42450       | 15.0/ 7.0-8  | NA         | Small Crossblock   | 7.0"        | 15.0"        | 49.0"         | 6"               | 6"                 | 7.5"          | RD20                             | Flat Track & TT |
| 42500       | 15.0/ 8.0-8  | NA         | Small Crossblock   | 8.0"        | 15.0"        | 49.5"         | 7"               | 7"                 | 8.5"          | RD20                             | Flat Track & TT |
| 42550       | 16.0/ 8.5-8  | NA         | Small Crossblock   | 8.5"        | 16.0"        | 53.5"         | 9"               | 9"                 | 10.5"         | RD20                             | Flat Track & TT |

REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES.  
FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.

# UTV / SxS

| ITEM NUMBER | TIRE SIZE    | TREAD PATTERN    | TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | COMPOUND COMPARISON SOFT TO FIRM | APPLICATION  |
|-------------|--------------|------------------|-------------|--------------|---------------|------------------|--------------------|---------------|----------------------------------|--------------|
| 16400       | 27.5/8.0-15  | Super Chain Link | 8.0"        | 27.75"       | 87.0"         | 7-8"             | 8"                 | 10.5"         | M500                             | Prod 1000/PS |
| 16470       | 27.0/9.0-15  | Knobby           | 9.0"        | 27.0"        | 84.25"        | 7-8"             | 8"                 | 9.75"         | M550                             | Short Course |
| 16510       | 30.0/10.0-15 | Knobby           | 10.0"       | 30.0"        | 92.5"         | 7-8"             | 8"                 | 10.25"        | M550                             | Short Course |

| SOFT |      | COMPOUND |      |      |      |       |       |  |       | FIRM  |     |
|------|------|----------|------|------|------|-------|-------|--|-------|-------|-----|
| D10  | RD12 | D12      | RD15 | RD20 | RD30 |       |       |  |       | H500  |     |
| D10A |      |          |      | D20A | D30A | M500  | M550  |  |       |       |     |
|      |      |          |      | T10  | T20  | MX150 | XC175 |  | MX200 | XC200 | T30 |

**WARNING:** Not for recreational use. Hoosier ATV Tires are designed and manufactured for racing purposes only, within a closed course for organized competitions. The prohibited use of Hoosier Racing Tires on public roadways may result in unexpected loss of traction, unexpected loss of vehicle control, or sudden loss of tire pressure resulting in a vehicle crash and possible **SERIOUS PERSONAL INJURY OR DEATH.**



REFER TO INSIDE FRONT COVER FOR NO WARRANTY POLICY AND WARNINGS.

INDEPENDENT DEALERS MUST ESTABLISH THEIR OWN PRICES. FOR PRICING CONTACT YOUR NEAREST DISTRIBUTOR ON BACK OF CATALOG.



Proudly Manufactured By



HOOSIER

**GENERAL TIRE**

SLICK



CATALOG # : 3910027 • 3920044 • 393471013 • 393491117 • 393701485 • 394732642 • 394912124 • 394912262 • 394982468 • 394992640

WET



CATALOG # : 39270SCWET

DIRT



CATALOG # : 40301D45 • 40310D70

Select Tires Proudly Manufactured By



## Renner Racing Vintage

'Continental Renner Racing' was already at home on racetracks around the world in the 1960s and 1970s. The tire was developed to ensure safe, fair racing based on the strict specifications set down by the FIA.



The Continental Renner Racing is built exclusively in the USA by Hoosier Racing Tire, where we have been exclusively producing racing tires for over 60 years.

A large part of our production has always been bias-ply, which are manufactured in 3 shifts a day, 7 days a week. In this way, Hoosier ensures that the tires supplied to our customers are of a high quality and consistently reliable product run after run, set after set.

On the circuit this means: the Continental Renner Racing is very consistent over a race distance and it offers ideal feedback to the driver, which in turn gives confidence to the driver.

In intensive tests and within the framework of the technical specifications of the FIA, the Continental Renner Racing has proven to be a product that is perfectly tailored to historic vehicles.

We look forward to seeing this tire back on the world's circuits in the future.

| TREAD WIDTH | APPROX. DIA. | APPROX. CIRC. | RECOM. RIM WIDTH | MEASURED RIM WIDTH | SECTION WIDTH | MODEL         |
|-------------|--------------|---------------|------------------|--------------------|---------------|---------------|
| 4.8"        | 19.6"        | 61.5"         | 5.0-6.0"         | 5.0"               | 6.8"          | Renner Racing |
| 4.7"        | 21.1"        | 66.3"         | 5.0-6.0"         | 5.0"               | 6.9"          | Renner Racing |
| 4.6"        | 22.2"        | 69.7"         | 5.0-6.0"         | 5.0"               | 6.6"          | Renner Racing |
| 5.2"        | 23.8"        | 74.7"         | 5.0-6.0"         | 5.5"               | 8.3"          | Renner Racing |
| 5.1"        | 24.7"        | 77.6"         | 5.0-6.0"         | 5.5"               | 7.8"          | Renner Racing |
| 4.1"        | 24.0"        | 75.4"         | 5.0-6.0"         | 5.0"               | 6.3"          | Renner Racing |
| 4.8"        | 24.7"        | 77.6"         | 5.0-6.0"         | 6.0"               | 7.7"          | Renner Racing |
| 5.1"        | 25.5"        | 80.1"         | 6.0-7.0"         | 6.5"               | 8.2"          | Renner Racing |
| 5.5"        | 26.7"        | 83.8"         | 6.5-7.5"         | 7.0"               | 9.2"          | Renner Racing |
| 5.8"        | 27.3"        | 85.7"         | 7.0-8.0"         | 7.5"               | 9.9"          | Renner Racing |
| 6.8"        | 27.6"        | 86.7"         | 8.0-9.0"         | 8.5"               | 11"           | Renner Racing |
| 5.0"        | 27.6"        | 86.7"         | 5.5-6.5"         | 6.0"               | 8.3"          | Renner Racing |



CONTINENTALTIRE.COM



# ExtremeContact™ Force

The ExtremeContact™ Force is a stylish summer ultra-high performance competition tire for both enthusiasts and professionals. Ideal for endurance racing, this tire comes complete with SportPlus™ Technology, which provides responsive handling, better grip on wet roads, and extended tread life.

## UTQG - All Sizes

| Treadwear | Traction | Temperature |
|-----------|----------|-------------|
| 200       | A        | A           |

| Rim Diameter |
|--------------|
| 15 - 20      |

| Aspect Ratio |
|--------------|
| 30 - 50      |

| Speed Rating |
|--------------|
| V, W         |

## Benefits

- Consistent lap times
- Predictable on track
- Designed for dry and wet conditions
- Exceptional tread life
- Qualifies for 200 UTQG competition
- Designed for track and street use

## Technologies and Features

### SportPlus™ Technology

- Provides responsive handling
- Grips better on wet roads
- Extends tread life



## Current sizes

| Conti Article # | Hoosier Item # | Tire Size    | Load Rating | Speed Rating | Load Range | Tire Dia. | Circ. | Tread Width | Sec. Width | Rim Width | Tread Depth | Weight    | Rim Widths | Max Inflation | Revs Per Mile | UTQG  |
|-----------------|----------------|--------------|-------------|--------------|------------|-----------|-------|-------------|------------|-----------|-------------|-----------|------------|---------------|---------------|-------|
| 03122340000     | 45515CF        | 205/50 R 15  | 89          | V            | XL         | 23,1      | 72,6  | 7,1         | 8,4        | 6,5       | 7           | 19,5 lbs. | 5,5-7,5    | 51            | 900           | 200AA |
| 03122350000     | 45530CF        | 225/45 R 15  | 87          | V            | SL         | 22,8      | 71,6  | 7,8         | 9,2        | 7,5       | 7           | 20,1 lbs. | 7,0-9,5    | 51            | 904           | 200AA |
| 03134560000     | 45545CF        | 245/40 R 15  | 92          | V            | XL         | 22,7      | 71,0  | 8,6         | 10,0       | 8,5       | 7           | 20,8 lbs. | 8,0-9,5    | 51            | 917           | 200AA |
| 03122250000     | 45710CF        | 225/40 ZR 17 | 90          | W            | XL         | 24,1      | 75,7  | 7,9         | 9,3        | 8,0       | 7           | 21,0 lbs. | 7,5-9,0    | 51            | 862           | 200AA |
| 03122360000     | 45715CF        | 225/45 ZR 17 | 94          | W            | XL         | 25,1      | 78,7  | 7,8         | 9,2        | 7,5       | 7           | 26,1 lbs. | 7,0-9,5    | 51            | 829           | 200AA |
| 03122370000     | 45730CF        | 245/40 ZR 17 | 95          | W            | XL         | 24,8      | 78,0  | 8,6         | 10,0       | 8,5       | 7           | 23,2 lbs. | 8,0-9,5    | 51            | 840           | 200AA |
| 03122390000     | 45740CF        | 255/40 ZR 17 | 98          | W            | XL         | 25,1      | 78,7  | 8,9         | 10,5       | 9         | 7           | 24,3 lbs. | 8,5-10,0   | 51            | 830           | 200AA |
| 03134570000     | 45750CF        | 275/35 ZR 17 | 98          | W            | XL         | 24,6      | 77,0  | 9,9         | 11,1       | 9,5       | 7           | 24,7 lbs. | 9,0-11,0   | 51            | 847           | 200AA |
| 03122260000     | 45810CF        | 245/35 ZR 18 | 92          | W            | XL         | 24,8      | 77,8  | 8,7         | 10,1       | 8,5       | 7           | 23,2 lbs. | 8,0-9,5    | 51            | 839           | 200AA |
| 03122380000     | 45820CF        | 245/40 ZR 18 | 97          | W            | XL         | 25,8      | 81,0  | 8,6         | 10,0       | 8,5       | 7           | 24,5 lbs. | 8,0-9,5    | 51            | 808           | 200AA |
| 03122410000     | 45830CF        | 275/35 ZR 18 | 99          | W            | XL         | 25,5      | 80,1  | 10,0        | 11,1       | 9,5       | 7           | 25,9 lbs. | 9,0-11,0   | 51            | 812           | 200AA |
| 03122270000     | 45840CF        | 295/30 ZR 18 | 98          | W            | XL         | 25,0      | 78,4  | 10,9        | 12,1       | 10,5      | 7           | 26,5 lbs. | 10,0-11,0  | 51            | 832           | 200AA |
| 03122420000     | 45860CF        | 315/30 ZR 18 | 98          | W            | SL         | 25,4      | 79,7  | 11,7        | 12,8       | 11        | 7           | 28,8 lbs. | 10,5-11,5  | 51            | 817           | 200AA |
| 03134580000     | 45865CF        | 335/30 ZR 18 | 106         | W            | XL         | 26,0      | 81,6  | 12,4        | 13,4       | 12        | 7           | 30,2 lbs. | 11,5-12,5  | 51            | 800           | 200AA |
| 03122280000     | 45870CF        | 345/35 ZR 18 | 109         | W            | SL         | 27,5      | 86,4  | 12,8        | 13,8       | 12        | 7           | 33,7 lbs. | 11,5-13,5  | 51            | 755           | 200AA |
| 03122290000     | 45910CF        | 235/35 ZR 19 | 91          | W            | XL         | 25,6      | 80,2  | 8,3         | 9,8        | 8,5       | 7           | 22,7 lbs. | 8,0-9,5    | 51            | 815           | 200AA |
| 03122400000     | 45920CF        | 265/35 ZR 19 | 98          | W            | XL         | 26,3      | 82,7  | 9,5         | 11,0       | 9,5       | 7           | 26,3 lbs. | 9,0-10,5   | 51            | 790           | 200AA |
| 03122300000     | 45945CF        | 295/30 ZR 19 | 100         | W            | XL         | 26,0      | 81,7  | 10,9        | 12,1       | 10,5      | 7           | 27,8 lbs. | 10,0-11,0  | 51            | 800           | 200AA |
| 03122310000     | 45960CF        | 315/30 ZR 19 | 104         | W            | XL         | 26,6      | 83,4  | 11,7        | 12,8       | 11        | 7           | 30,3 lbs. | 10,5-11,5  | 51            | 786           | 200AA |
| 03122320000     | 45970CF        | 325/30 ZR 19 | 105         | W            | XL         | 26,7      | 83,8  | 12,0        | 13,1       | 11        | 7           | 30,4 lbs. | 11,0-12,0  | 51            | 779           | 200AA |
| 03122330000     | 45980CF        | 345/30 ZR 19 | 109         | W            | XL         | 27,1      | 85,2  | 12,8        | 13,8       | 12        | 7           | 33,7 lbs. | 11,5-12,5  | 51            | 785           | 200AA |
| 03129980000     | 45982CF        | 245/35 ZR 20 | 95          | Y            | XL         | 26,9      | 84,3  | 8,7         | 10,0       | 8,5       | 7           | 24,9 lbs. | 8,0-9,0    | 49            | TBD           | 200AA |
| 03129990000     | 45984CF        | 265/30 ZR 20 | 94          | Y            | XL         | 26,5      | 83,1  | 9,6         | 11,0       | 9,5       | 7           | 26,0 lbs. | 9,0-10,5   | 49            | TBD           | 200AA |
| 03130000000     | 45986CF        | 295/30 ZR 20 | 101         | Y            | XL         | 27,1      | 85,2  | 10,9        | 12,1       | 10,5      | 7           | 29,1 lbs. | 10,0-11,0  | 51            | TBD           | 200AA |
| 03130020000     | 45988CF        | 305/30 ZR 20 | 103         | Y            | XL         | 27,4      | 86,1  | 11,3        | 12,6       | 11        | 7           | 29,9 lbs. | 10,5-11,5  | 51            | TBD           | 200AA |
| 03130030000     | 45990CF        | 335/25 ZR 20 | 99          | Y            | SL         | 26,6      | 83,6  | 12,5        | 13,6       | 12        | 7           | 31,2 lbs. | 11,5-12,5  | 51            | TBD           | 200AA |
| 03130040000     | 45992CF        | 345/25 ZR 20 | 100         | Y            | SL         | TBD       | TBD   | TBD         | TBD        | TBD       | 7           | 32,3 lbs. | 12,0-13,0  | 51            | TBD           | 200AA |

## Fully street legal / DOT approved



CONTINENTALTIRE.COM

## New sizes due in 2024

### Spring '24

15" 245/40R-15  
17" 275/35R-17

### Early Summer '24

18" 295/40R-18  
335/30R-18  
345/35R-18

20" 265/30R-20  
395/30R-20  
305/30R-20  
335/30R-20  
345/30R-20



TOYOTA GAZOO Racing

**GR CUP**  
NORTH AMERICA

Proudly Manufactured By

 **HOOSIER**

The Continental “GR CUP” slick and Extreme Contact Wet are the compulsory tires for the 2024 GR Cup Series.



GR Cup Rain Tires

245 / 620 R18

GR Cup Slick Tires

245 / 620 R18





# PERFORMANCE APPAREL DESIGNED FOR CHAMPIONS

We started the Hoosier Premium Apparel line with a goal to bring together value and durability in clothing that fits our fans' fast paced lifestyle. From the pits to the parties, our apparel not only feels good, but looks great and is built to stand the test of time.

The performance you expect  
from the number one racing tire  
manufacturer in the world!



APPAREL MADE FOR *ALL* CHAMPIONS



**MEN'S LINE**



**WOMEN'S LINE**



**YOUTH LINE**

SCAN TO  
**SHOP**



HOOSIERTIRE.COM



## HOOSIER RACING TIRE

### CORPORATE Headquarters

65465 S.R. 931 ♦ Lakeville, IN 46536 ♦ (574) 784-3152 ♦ Fax: (574) 784-2385  
[www.hoosiertire.com](http://www.hoosiertire.com)

### Hoosier Racing Tire Europe Continental Reifen Deutschland GmbH

Buettnerstr. 25 ♦ 30165 Hannover, Germany ♦ +49 (172) 291-2544

## DISTRIBUTORS

### Hoosier Tire East

56-H Loomis Street ♦ Manchester, CT 06042  
Phone: (860) 646-9646 ♦ Fax: (860) 646-2054  
E-mail: [rob@hoosiertireeast.com](mailto:rob@hoosiertireeast.com)  
[www.hoosiertireeast.com](http://www.hoosiertireeast.com)

### Hoosier Tire Great Plains Kansas

11771 West Kellogg ♦ Wichita, KS 67209  
Phone: (316) 462-1430 ♦ Fax: (316) 462-1487  
E-mail: [sales@hoosiertiregp.com](mailto:sales@hoosiertiregp.com)  
[www.hoosiertiregp.com](http://www.hoosiertiregp.com)

### Hoosier Tire Mid-Atlantic Pittsburgh

111 South Pike Road, Suite 203 ♦ Sarver, PA 16055  
Phone: (724) 360-8000 ♦ Fax: (724) 360-8044  
E-mail: [sales@hoosiermidatlantic.com](mailto:sales@hoosiermidatlantic.com)  
[www.hoosiermidatlantic.com](http://www.hoosiermidatlantic.com)

### Hoosier Tire Mid-Atlantic Baltimore

2931 Industrial Park Drive ♦ Finksburg, MD 21048  
Phone: (410) 833-2061 ♦ Fax: (410) 833-5921  
E-mail: [sales@hoosiermidatlantic.com](mailto:sales@hoosiermidatlantic.com)  
[www.hoosiermidatlantic.com](http://www.hoosiermidatlantic.com)

### Hoosier Tire Midwest Indianapolis

4155 North CR 1000 East, Suite A  
Brownsburg, IN 46112  
Phone: (317) 858-1234 ♦ Fax: (317) 858-1307  
E-mail: [hoosiertiregirl@gmail.com](mailto:hoosiertiregirl@gmail.com)  
[www.racetires.com](http://www.racetires.com)

### Hoosier Tire Midwest Springfield

3886 E. State Route 54 ♦ Springfield, IL 62707  
Phone: (217) 522-1955 ♦ Fax: (217) 670-0746  
E-mail: [jessica@racetires.com](mailto:jessica@racetires.com)  
[www.racetires.com](http://www.racetires.com)

### Hoosier Tire Midwest Plymouth

1801 Jim Neu Drive ♦ Plymouth, IN 46563  
Phone: (574) 936-8344 ♦ Fax: (574) 936-1673  
E-mail: [hoosiertireply@aol.com](mailto:hoosiertireply@aol.com)  
[www.racetires.com](http://www.racetires.com)

### Hoosier Tire North

12680 Industrial Blvd NW ♦ Elk River, MN 55330  
Phone: (763) 428-8780 ♦ Fax: (800) 555-8577  
E-mail: [bfolmer1@aol.com](mailto:bfolmer1@aol.com)  
[www.hoosiertirenorth.com](http://www.hoosiertirenorth.com)

### Hoosier Tire Ohio Valley

1933 Staunton Turnpike ♦ Parkersburg, WV 26104  
Phone: (304) 428-5000 ♦ Fax: (304) 485-8038  
1-800-430-7223 ♦ E-mail: [todd@poske.com](mailto:todd@poske.com)  
[www.poske.com](http://www.poske.com)

### Hoosier Tire South

**Asphalt**  
P.O. Box 537 ♦ Welcome, NC 27374  
Phone: (336) 731-6100 ♦ Fax: (336) 731-6086  
E-mail: [hoosieraspl@lexcominc.net](mailto:hoosieraspl@lexcominc.net)

### Hoosier Tire South

**Road & Drag**  
P.O. Box 6080 ♦ Maryville, TN 37802  
Phone: (865) 984-3232 ♦ Fax: (865) 681-0775  
E-mail: [road&drag@hoosiertiresouth.com](mailto:road&drag@hoosiertiresouth.com)

### Hoosier Tire South

**Dirt Oval**  
P.O. Box 1437 ♦ Clinton, TN 37717  
Phone: (865) 457-9888 ♦ Fax: (865) 457-8033  
E-mail: [hoosiertire@bellsouth.net](mailto:hoosiertire@bellsouth.net)

### Hoosier Tire Southwest

**Mesquite**  
103 Gross Road, Bldg. A ♦ Mesquite, TX 75149  
Phone: (972) 289-RACE (7223) ♦ Fax: (972) 289-8055  
E-mail: [tom@smileysracing.com](mailto:tom@smileysracing.com)  
[tclonch@smileysracing.com](mailto:tclonch@smileysracing.com) ♦ [www.smileysracing.com](http://www.smileysracing.com)

### Hoosier Tire Southwest

**Oklahoma City**  
3208 SW 59th, Suite A ♦ Oklahoma City, OK 73119  
Phone: (405) 686-7112 ♦ Fax: (405) 681-2242  
E-mail: [tom@smileysracing.com](mailto:tom@smileysracing.com)

### Hoosier Tire Southwest

**Houston**  
1622 Sawdust Road ♦ The Woodlands, TX 77380  
Phone: (281) 362-7872 ♦ Fax: (281) 292-4996  
E-mail: [tom@smileysracing.com](mailto:tom@smileysracing.com)  
[tclonch@smileysracing.com](mailto:tclonch@smileysracing.com) ♦ [www.smileysracing.com](http://www.smileysracing.com)

### Hoosier Tire West

2608 E. California ♦ Fresno, CA 93721  
Phone: (559) 485-4612 ♦ Fax: (559) 485-4632  
E-mail: [racing@hoosiertirewest.com](mailto:racing@hoosiertirewest.com)  
[www.hoosiertirewest.com](http://www.hoosiertirewest.com)

### Hoosier Tire Canada - NY

1733 Maryland Avenue ♦ Niagara Falls, NY 14305  
Phone: (716) 285-7502 ♦ Fax: (800) 285-1454  
E-mail: [usasales@bicknellracingproducts.com](mailto:usasales@bicknellracingproducts.com)  
[www.bicknellracingproducts.com](http://www.bicknellracingproducts.com)

## INTERNATIONAL

### Hoosier Tire Australia

17 Blind Road ♦ Nelson NSW, Australia 2765  
Phone: (61) 296 791990 ♦ Fax: (61) 296 791187  
E-mail: [mdimport@bigpond.net.au](mailto:mdimport@bigpond.net.au)  
[www.hoosier.com.au](http://www.hoosier.com.au)

### Hoosier Tire Canada

117-119 Cushman Road  
St. Catharines, Ontario, Canada L2M 6S9  
Phone: (905) 685-7223 Ext. 221 ♦ Fax: (800) 891-0521  
E-mail: [ronmckay@bicknellracingproducts.com](mailto:ronmckay@bicknellracingproducts.com)  
[www.hoosiertirecanada.com](http://www.hoosiertirecanada.com)

### Hoosier Tire New Zealand

32 William Pickering Drive  
Albany, Auckland, 0632, New Zealand  
Phone: (09) 415 1388 ♦ Fax: (09) 415 0788  
E-mail: [8@cardwells.co.nz](mailto:8@cardwells.co.nz) ♦ [www.cardwells.co.nz](http://www.cardwells.co.nz)

### Hoosier Tire Western Canada

11703 Groat Road NW ♦ Edmonton, Alberta, Canada T9E 7B1  
Phone: (780) 909-8467 ♦ Mobile: (587) 768-0490  
E-mail: [info@hoosiertirewc.ca](mailto:info@hoosiertirewc.ca)  
[www.hoosiertirewesterncanada.com](http://www.hoosiertirewesterncanada.com)

### Hoosier Tire U.K.

P.O. Box 380 ♦ Horley Surrey, RH6 0WW  
(England/Scotland/Wales/Ireland),  
Netherlands (Holland), Belgium, Germany & France  
Phone: +44 (0) 1293 863579  
E-mail: [info@hoosiertyre.co.uk](mailto:info@hoosiertyre.co.uk)  
[www.hoosiertyre.co.uk](http://www.hoosiertyre.co.uk)



## TIRES DESIGNED FOR CHAMPIONS

To learn more about purchasing Hoosier tires in areas not listed, you can e-mail [internationalsales@hoosiertire.com](mailto:internationalsales@hoosiertire.com)